


VELUX®

Skylights



The No Leak Skylight
No Leak Promise
No Worries

Deck mounted skylights

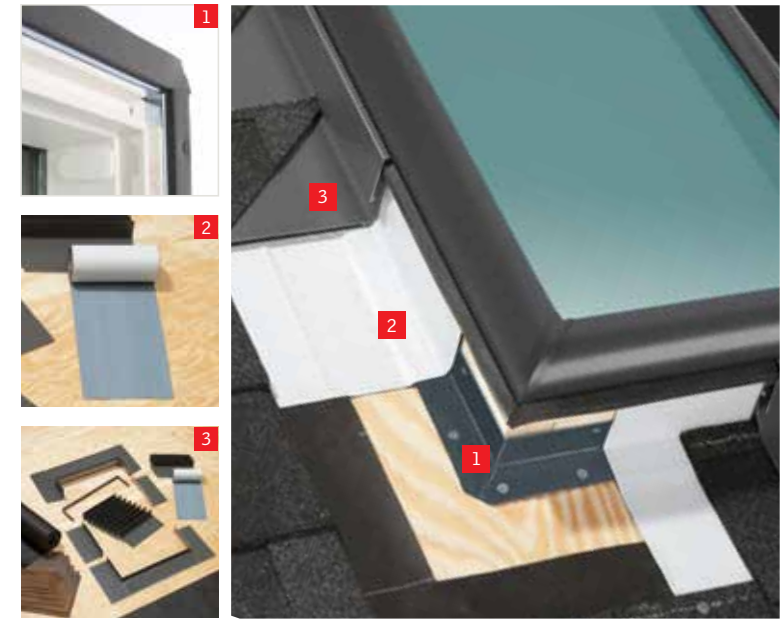

3 layers of water protection for deck mounted skylights

- 1** The pre-attached deck seal on all deck mounted skylights provides a seal between the frame and roof deck for a leak-proof installation.
- 2** Adhesive underlayment for secondary water protection against the harshest weather conditions.
- 3** Engineered flashing for easy installation and primary water protection.

VELUX flashing must be purchased in order to qualify for the 10-year installation warranty.

10-year installation warranty.
VELUX flashing required to qualify.

Bringing light to life™



Solar Powered "Fresh Air" Skylight – Model VSS

- Optional in-stock blinds available factory installed.
- The solar panel will work on cloudy days and with indirect light. It does not have to be exposed to direct sunlight to function.
- Comes complete with cut to size filler pieces for the drywall return groove. When replacing an existing skylight.
- With an integrated rain sensor the solar powered skylight will close automatically, in case of inclement weather.
- Included with your skylight is the intelligent touch remote control powered by VELUX INTEGRA®. Comes with pre-programmed settings for ease of use.

Eligible for a **30%** Federal tax credit
 Receive an average of \$850* with federal tax credit eligibility.

* For more information visit www.veluxusa.com/taxcredits



Manual "Fresh Air" skylight – Model VS

- Optional in-stock blinds available factory installed.
- Features pre-finished white wood frame and protective aluminum or copper cladding.
- Smooth-turning handle available for when the skylight is installed within reach.



Fixed skylight – Model FS

- Optional in-stock blinds available factory installed.
- Features pre-finished white wood frame and protective aluminum or copper cladding.
- Streamlined exterior profile does not obstruct your roofline.



Fixed replacement skylight – Model FSR

- Optional in-stock blinds available factory installed
- 2.75-in. larger deck seal to span wider for less accurate openings.
- No drywall groove to match existing construction - simply trim the drywall to the opening.



Electric "Fresh Air" skylight – Model VSE

- Optional in-stock blinds available factory installed.
- Included with your skylight is the intelligent touch remote control powered by VELUX INTEGRA®. Comes with pre-programmed settings for ease of use.
- Single hard wire connects into a standard junction box.
- Wall mounted keypad and interface to home automation systems are available.

30% Federal tax credit on solar powered blinds*
 Available in room darkening - double pleated blinds, blackout blinds, light filtering - single pleated blinds and light filtering blinds

Factory installed in-stock blinds


If one of the in-stock blinds below are ordered with your skylights, VELUX will factory install your blind for you, or you may select one of our special order blinds. Please visit veluxusa.com to see a listing of special order blinds.

Note: Special order blinds are not pre-installed with your skylight order and require a two week lead time.

In-stock room darkening - double pleated blinds (Solar powered/manual)



In-stock light filtering - single pleated blinds (Solar powered/manual)

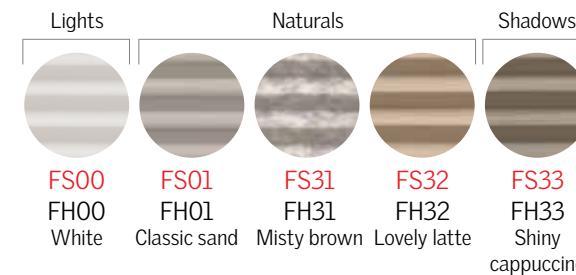

In-stock venetian blind (FS and VS only) (Manual)



| Skylights | VSS | VSE | VS | FS/FSR |
|---|-----|-----|----|--------|
| Solar powered room darkening double pleated blinds | • | • | • | • |
| Solar powered light filtering single pleated blinds | • | • | • | • |
| Solar powered blackout blinds | • | • | • | • |
| Solar powered light filtering blinds | • | • | • | • |
| Manual room darkening double pleated blinds | | | | • |
| Manual light filtering single pleated blinds | | | | • |
| Manual blackout blinds | | | | • |
| Manual light filtering blinds | | | | • |
| Manual venetian blinds | | | • | • |

Notes:

- On the VS skylight, removal of the insect screen is required to operate or adjust the venetian blind.
- Blinds not available for FS size C12.
- Solar blinds not available for FS A06 size.

The No Leak Skylight
 No Leak Promise
 No Worries

10-year installation warranty.
 VELUX flashing required to qualify.



Deck mounted skylight size chart (Rough openings)



| Inch | 14 1/2 | 21 | 22 1/2 | 30 1/16 | 44 1/4 |
|----------|------------------|------------------|------------------|------------------|-----------------------|
| mm | 368 | 533 | 572 | 763 | 1123 |
| 22 15/16 | | FS; FSR | | | |
| 26 7/8 | FS; VS; VSE; VSS | D26 | | FS; VS; VSE; VSS | |
| 30 | | | FS; FSR; VSS | | |
| 37 7/8 | FS; VS; VSE; VSS | | FS; VS; VSE; VSS | | |
| 45 3/4 | FS | FS; VS; VSE; VSS | FS; FSR | FS; VS; VSE; VSS | FS; FSR; VS; VSE; VSS |
| 54 7/16 | | FS; VS; VSE; VSS | | FS; VS; VSE; VSS | |
| 70 1/4 | | FS | | | |

Deck mounted skylight flashing

| Model | Installation | Roofing |
|-------|-------------------|--|
| EDL | Single | Shingle/Slate (14° - 85° roof pitch) |
| EDW | Single | Tile (14° - 85° roof pitch) |
| EDM | Single | Metal (14° - 85° roof pitch) |
| EKL | Gang | Shingle/Slate (14° - 85° roof pitch) |
| EKW | Gang | Tile (14° - 85° roof pitch) |
| ECB* | Low pitch; single | Site built curb (14° - 85° roof pitch) |

* Does not come with VELUX adhesive skylight underlayment, and is not covered by the No Leak warranty.

FSR sizes (Rough openings)



| Size code | D26 | D06 | M02 | S06 |
|------------------|-----------------------|-----------------|------------------|-----------------|
| Outside frame | in. 23 3/4 x 23 7/16 | 23 3/4 x 46 1/4 | 30 3/16 x 30 1/2 | 44 3/4 x 46 1/4 |
| Rough opening | in. 22 1/2 x 22 15/16 | 22 1/2 x 45 3/4 | 30 1/16 x 30 | 44 1/4 x 45 3/4 |
| Ideal fit Width | in. 21 1/8 - 22 3/8 | 21 1/8 - 22 3/8 | 28 1/2 - 29 3/4 | 42 3/4 - 44 |
| Ideal fit Height | in. 21 1/2 - 22 3/4 | 44 1/4 - 45 1/2 | 28 1/2 - 29 3/4 | 44 1/4 - 45 1/2 |

Note: In general, the FSR allows a finished opening variance of 2" on the width and height for an ideal fit where the front of the drywall will be under the white skylight frame. An additional 2" in width and height variance will allow the skylight to fit the opening, but additional trim will be required.

Choosing the right glass for your skylight

For out of reach applications




Clean, Quiet & Safe glass (xx04) - recommended

Standard on: VSS, VSE

Available on: VS, FS

Clean, Quiet & Safe glass also available in the following options:



Impact (xx06)

Available on: VSS, VSE, VS, FS



Snowload (xx10)

Available on: VSE, VS, FS




Clean

Features Neat® glass coating to keep your skylight cleaner longer, leaving skylights virtually spotless



Quiet

Reduce unwanted outside noise by up to 25% less than a standard double pane glass, and up to 50% less than a plastic skylight



Safe

VELUX recommends and building codes require laminated glass for out of reach applications

For in reach applications



Dual pane tempered glass (xx05)

Available on: FS, VS, QPF



VELUX America Inc.

450 Old Brickyard Road • PO Box 5001 • Greenwood, SC 29648-5001
Tel 1-800-888-3589 • Fax 1-864-943-2631 • www.veluxusa.com



www.facebook.com/veluxamerica
www.twitter.com/veluxamerica
www.youtube.com/veluxusa