


SURFACE FINISH TABLE	
SYMBOL	DESCRIPTION
	HIGHLY POLISHED Ra = 0.5 MICRONS
	SPARK ERODED REF. CHARMILLES 33

NOTES:

1. ALL DIMENSIONS IN mm.
2. ALL MOULDINGS TO BE FREE OF BURRS, FLK AND SINK MARKS
MOULDINGS TO BE FREE OF DISTORTION AND TWISTS
3. PROCESS - INJECTION MOULDED.
4. MATERIAL - RUBBER.
5. COLOUR - BLACK (PANTONE REF. : 900)
6. GENERAL TOLERANCES = +0.25mm - -0.25mm.
7. GENERAL WALL THICKNESS 2mm (U.O.S)
8. DRAFT TAPERS = 0.25 DEGREES (U.O.S)
9. SURFACE FINISH - REFER TO SURFACE FINISH TABLE.
10. BREAK RADII - 1mm (U.O.S).

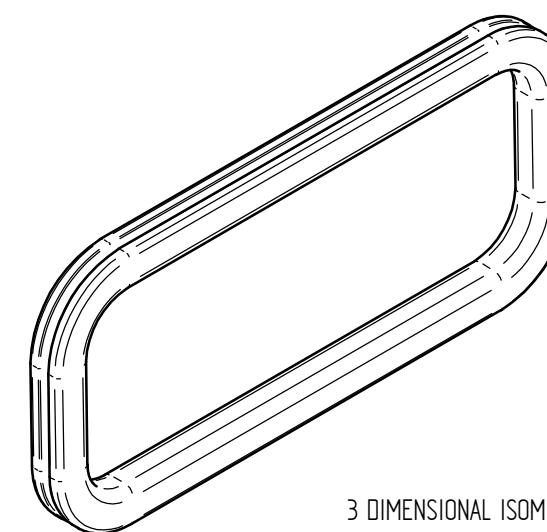

3 DIMENSIONAL ISOMETRIC VIEW
DO NOT SCALE

3		02/11/07	-	JH		
2		01/10/07	LAYOUT	JH		
1	-	17/09/07	FOR DISCUSSION PURPOSES ONLY	JH		
ISSUE	CHNG	DATE	DESCRIPTION	DRAWN	CHECKED	APPROVED

 083 928 9240 JASOMMARCHOFFMAN@GMAIL.CO.ZA			CLIENT NAME : UJ		
			CLIENT CONTACT :		
			CLIENT DRWNG NO. :		
PROJECT : GAS STOVE			TITLE : RUBBER INSERTS		
		SCALE : 1:1 (UOS)	SHEET: 1 OF 1	DRAWING NO. : UJ07/03/03/008	

A3

SOLID EDGE COMPUTER GENERATED DRAWING

NOT TO BE USED FOR MANUFACTURE UNLESS APPROVED AND SIGNED BY CLIENT

DO NOT SCALE OFF DRAWING

DO NOT CHANGE BY HAND

COPYRIGHT JASON HOFFMAN 2007

SOLID EDGE ACADEMIC COPY