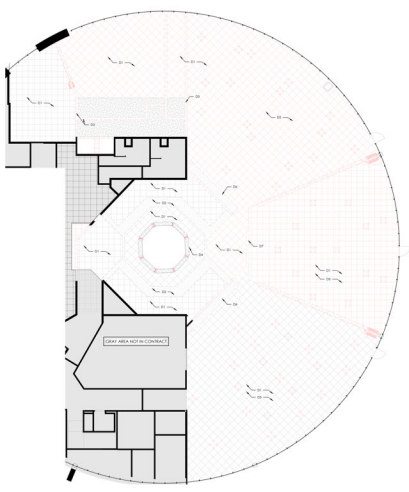

1 **REFLECTED CEILING PARTIAL DEMOLITION PLAN**
1/8" = 1'-0"

DEMOLITION

GENERAL NOTES

A. IDENTIFICATION AND/OR ABATEMENT OF HAZARDOUS MATERIALS IS THE RESPONSIBILITY OF THE OWNER OR OTHERS. CONTRACTOR SHALL NOTIFY OWNER OF ANY SUCH CONDITIONS BEFORE THE WORK OF THIS SECTION BEGINS.

B. WHERE FLOOR FINISHES ARE NOTED TO BE REMOVED, REMOVE ALL FINISHES, ADHESIVES, SETTING BEDS, ETC. DOWN TO STRUCTURAL SUBSTRATE.

C. ALL WIRE SUPPORTS THAT WILL BE VISIBLE / EXPOSED ARE TO BE U.N.O. 1/2X1 WOOD FURRING STRIPS FOR ACT GRID LOCAT AND GRAB BAG CONNECTION UNLESS OTHERWISE NOTED. VERIFY WITH ARCHITECT IN FIELD.

D. ALL EXISTING MECHANICAL, ETC. EQUIPMENT FOR ALL PUNCHLIRS IN CEILING SURFACES.

E. CALCULATE WEIGHTS AND LOADS OF EXISTING CEILING SUSPENSION GRID AND SUPPLY AND INSTALL WEIGHT TEST AND LOAD RATED STRUCTURAL SUSPENSION GRID, COMPONENTS AND ASSEMBLIES TO MAKE PROPER CODE COMPLIANT AND SUFFICIENT.

F. PATCH AND REPAIR EXISTING GWB CEILINGS AS A RESULT OF REMOVAL OF EXISTING FINISHES AND/OR MECHANICAL EQUIPMENT.

G. ALL NEW AND EXISTING GWB CEILING TO BE PAINTED P-4.

KEYED NOTES

D1. REMOVE ALL EXISTING ACT MATERIAL, SUSPENSION SYSTEM AND ANY RELATED ALL ASSOCIATED FRAMING, BLOCKING, & MECHANICAL EQUIPMENT RESISTING ALL OTHER TRADES.

D2. REMOVE EXISTING GYPSUM BOARD CEILING INCLUDING ALL ASSOCIATED FRAMING.

D3. PATCH & REPAIR GYPSY WHERE WALLS WERE REMOVED.

D4. PATCH & REPAIR GYPSY WHERE PANELED WALLS WERE REMOVED.

D5. REMOVE EXISTING LIGHT FIXTURES TO BE REUSED/RE - PROTECT EXISTING LED LIGHT FIXTURES AND ASSOCIATED CONSTRUCTION / MATERIALS. COORD WITH ELECTRICAL & MECHANICAL

D6. REMOVE PORTION OF EXISTING GYPSUM BOARD CEILING, PATCH & REPAIR GYPSY AS REQUIRED FROM ADJACENCIES.

D7. REMOVE PORTION OF EXISTING WALL OR DECK ABOVE. COORDINATE REMOVALS W/ OTHER TRADES.

DASHED LINES REPRESENT THE REMOVAL OF ALL ASSOCIATED CEILINGS, UNDERLAYMENTS, FRAMING, & CEILINGS.

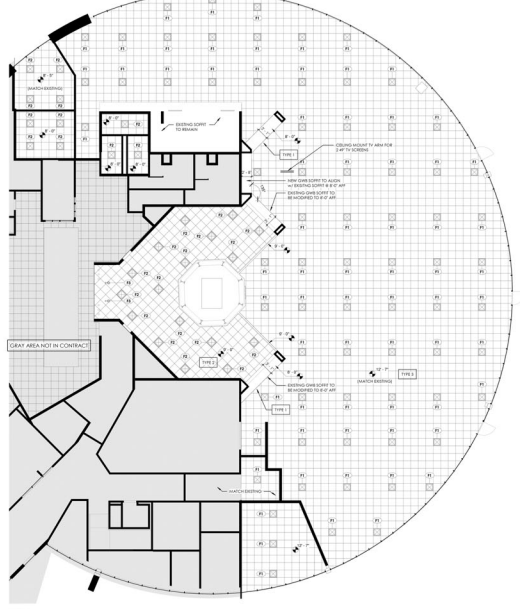

1 **REFLECTED CEILING PLAN**
1/8" = 1'-0"

CEILING PLAN

GENERAL NOTES

A. REFER TO MECHANICAL DRAWINGS FOR ADDITIONAL INFORMATION

B. REFER TO FIRE PROTECTION DRAWINGS FOR ADDITIONAL INFORMATION ON SPRINKLER HEADS

C. ALL WIRE SUPPORTS THAT WILL BE VISIBLE / EXPOSED ARE TO BE U.N.O. 1/2X1 WOOD FURRING STRIPS FOR ACT GRID LOCAT AND GRAB BAG CONNECTION UNLESS OTHERWISE NOTED. VERIFY WITH ARCHITECT IN FIELD.

D. ALL EXISTING MECHANICAL, ETC. EQUIPMENT FOR ALL PUNCHLIRS IN CEILING SURFACES.

E. CALCULATE WEIGHTS AND LOADS OF EXISTING CEILING SUSPENSION GRID AND SUPPLY AND INSTALL WEIGHT TEST AND LOAD RATED STRUCTURAL SUSPENSION GRID, COMPONENTS AND ASSEMBLIES TO MAKE PROPER CODE COMPLIANT AND SUFFICIENT.

F. PATCH AND REPAIR EXISTING GWB CEILINGS AS A RESULT OF REMOVAL OF EXISTING FINISHES AND/OR MECHANICAL EQUIPMENT.

G. ALL NEW AND EXISTING GWB CEILING TO BE PAINTED P-4.

CEILING TYPES - BASIS OF DESIGN

----	GWB CEILING
TYPE 1	3-5/8" METAL STUD W/ 1/2" GYPSUM WALL BOARD, PRIMED & PAINTED AS SPECIFIED
TYPE 2	TILE: ARMSTRONG KITCHEN ZONE 2'X2' GRID: ARMSTRONG 15/16" STANDARD PRELUDE
TYPE 3	TILE: ARMSTRONG CIRRUS 2'X2' TEGULAR TIM GRID: ARMSTRONG 15/16" STANDARD PRELUDE

LIGHT FIXTURES

F1	2x2 LED FLAT PANEL EPANEL 342-MEDIUM-BIOR-10K
F2	2x2 LED FLAT PANEL EPANEL 22-434L-10K
F3	WALL SCONCE W LITE MANUFACTURING - BELINDA W-36208-R1-RB3WC
F4	POST LIGHT W LITE MANUFACTURING-RIVIGRID ICON W-R172SP-R1-R1-RB/SLR-R1-UNC
F5	WALL LIGHT W LITE MANUFACTURING-RIVIGRID ICON W-R172SP-R1-R1-RB/SLR-R1/B-25-R1-UNC