



85~  
264V

### Applications

Wall washing, Square, Landscape, Garden, Advertising, Hotel, Parking

### General Specifications:

Input Voltage: 84-264V AC, 50/60Hz  
 Material: Aluminum alloy + tempered glass  
 LED: Bridgelux  
 CCT.: WW / CW  
 CRI.: >75  
 Beam angle: 120°  
 Cert.: UL  
 Wet Location  
 Color of housing: Bronze



Model: **LF12-10CW** (COOL WHITE, 5000K)  
**LF12-10WW** (WARM WHITE, 3500K)  
 Wattage: 13W, PF ≥ 0.9  
 Luminous Flux: 700 - 800lm  
 Dimension: 4.53in(L) × 3.43in(H) × 3.50in(W)  
 LED: Bridgelux chip COB



Model: **LF12-20CW** (COOL WHITE, 5000K)  
**LF12-20WW** (WARM WHITE, 3500K)  
 Wattage: 25W, PF ≥ 0.9  
 Luminous Flux: 1600 - 1800lm  
 Dimension: 7.09in(L) × 5.51in(H) × 4.13in(W)  
 LED: Bridgelux chip COB



Model: **LF12-30CW** (COOL WHITE, 5000K)  
**LF12-30WW** (WARM WHITE, 3500K)  
 Wattage: 36W, PF ≥ 0.9  
 Luminous Flux: 2400 - 2600lm  
 Dimension: 8.86in(L) × 7.28in(H) × 5.04in(W)  
 LED: Bridgelux chip COB



Model: **LF12-50CW** (COOL WHITE, 5000K)  
**LF12-50WW** (WARM WHITE, 3500K)  
 Wattage: 55W, PF ≥ 0.9  
 Luminous Flux: 3600 - 3800lm  
 Dimension: 11.22in(L) × 9.25in(H) × 5.63in(W)  
 LED: Bridgelux chip COB

## 12V LED GARDEN LIGHT

### Features:

1. The housing is made of high quality aluminum alloy. It has perfect appearance and excellent heat dispersion.
2. It uses full tempered glass, silicon rubber gasket with seal and 100% dip tested.
3. The LED garden light can save 50% more energy than HID. It is suitable for low temperature. Built-in constant current LED driver to provide steady performance and long lifespan. There is no need to repair or change light source for at least 30,000 hours. All products undergo burn-in test before shipment.

### Applications:

Landscape, Garden, Lawn, Wall (wet location)

### General Specifications:

Model #: **LF12-6CW** (COOL WHITE, 4100K)  
**LF12-6WW** (WARM WHITE, 3500K)  
 Wattage: 6W, PF ≥ 0.6  
 Luminous Flux: 400lm  
 Dimension: 2.83in × 3.62in × 6.30in  
 LED: Bridgelux chip COB



12V/  
6W




## FLOOD GARDEN LIGHT



85~  
264V



## LED FLOOD LIGHT

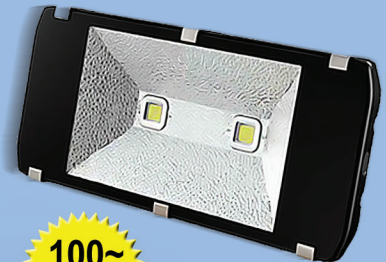

100~  
277V

## 12V LED GARDEN LIGHT

12V/  
6W




## LED FLOOD LIGHT



100~  
277V

Line Drawing:

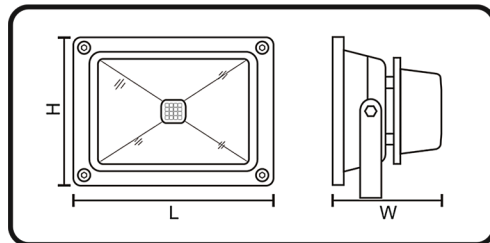

### Features:

1. The housing is made of high quality aluminum alloy.
2. It uses full tempered glass, silicon rubber gasket with seal, and 100% dip tested.
3. The LED floodlight can save 50% more energy than HID. It is suitable for low temperature. Built-in constant current LED driver provide steady performance and long lifespan. There is no need to repair or change light source for at least 30,000 hours. All products undergo burn-in test before shipment

### Applications:

Wall washing, Square, Landscape, Garden, Advertising, Hotel, Parking

### General Specifications:

Input Voltage: 100 - 277V AC, 50/60Hz  
 Material: Aluminum alloy + tempered glass  
 LED: Bridgelux,  
 CCT.: WW / CW  
 CRI.: >75  
 Beam angle: 120°  
 Cert.: UL  
 Wet Location  
 Color of housing: Bronze



10W

Model: **LF-10CW** (COOL WHITE, 5000K)  
**LF-10WW** (WARM WHITE, 3500K)  
 Wattage: 10W, PF ≥ 0.9  
 Luminous Flux: 700 - 800lm  
 Dimension: 4.53in(L) × 3.43in(H) × 3.50in(W)  
 LED: Bridgelux chip COB



20W

Model: **LF-20CW** (COOL WHITE, 5000K)  
**LF-20WW** (WARM WHITE, 3500K)  
 Wattage: 20W, PF ≥ 0.9  
 Luminous Flux: 1600 - 1800lm  
 Dimension: 7.09in(L) × 5.51in(H) × 4.13in(W)  
 LED: Bridgelux chip COB



30W

Model: **LF-30CW** (COOL WHITE, 5000K)  
**LF-30WW** (WARM WHITE, 3500K)  
 Wattage: 30W, PF ≥ 0.9  
 Luminous Flux: 2400 - 2600lm  
 Dimension: 8.86in(L) × 7.28in(H) × 5.04in(W)  
 LED: Bridgelux chip COB



50W

Model: **LF-50CW** (COOL WHITE, 5000K)  
**LF-50WW** (WARM WHITE, 3500K)  
 Wattage: 50W, PF ≥ 0.9  
 Luminous Flux: 3600 - 3800lm  
 Dimension: 11.22in(L) × 9.25in(H) × 5.63in(W)  
 LED: Bridgelux chip COB




60W

Model: **LF-60CW** (COOL WHITE, 5000K)  
**LF-60WW** (WARM WHITE, 3500K)  
 Wattage: 60W, PF ≥ 0.9  
 Luminous Flux: 4800 - 5000lm  
 Dimension: 11.34in(L) × 14.17in(H) × 4.45in(W)  
 LED: Bridgelux chip COB



100W

Model: **LF-100CW** (COOL WHITE, 5000K)  
**LF-100WW** (WARM WHITE, 3500K)  
 Wattage: 100W, PF ≥ 0.9  
 Luminous Flux: 6200 - 6500lm  
 Dimension: 13.15in(L) × 15.75in(H) × 4.92in(W)  
 LED: Bridgelux chip COB

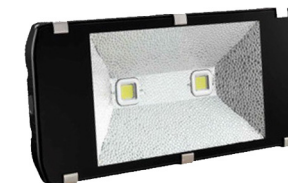

150W

Model: **LF-150CW** (COOL WHITE, 5000K)  
**LF-150WW** (WARM WHITE, 3500K)  
 Wattage: 150W, PF ≥ 0.9  
 Luminous Flux: 10000 - 11000lm  
 Dimension: 23.78in(L) × 11.26in(H) × 8.90in(W)  
 LED: Bridgelux chip COB