



VEHICLE SERVICE

Air Hammer



CL1534 AIR HAMMER

The CL1534 delivers 3,500 blows per minute for fast and powerful cutting action. Ideal for automotive exhaust work and general cutting, chipping, and scraping.

- Coil spring retainer for quick chisel changes
- 2-5/8 inch stroke length
- Accepts 0.401 round shank chisels

Stroke	5/8-in.
Blows/Min.	3,500
Chisel Shank	0.401-in.
Air Consumption Avg.	11 SCFM
Air Consumption Cont.	18.4 SCFM
Air Inlet	1/4 in. NPT
Min. Hose Size	3/8-in.
Weight	3.5 lbs.

Needle Scalers

CL1581 NEEDLE SCALER

The CL1581 needle scaler delivers 4,800 blows per minute for fast removal of rust, paint, weld slag, or dirt.

- Durable, hardened steel construction
- Compact, in-line design



Needle Quantity	12
Needle Size	1/8-in.
Blows/Min.	4800
Stroke	1.3-in.
Air Consumption Avg.	3.1 SCFM
Air Consumption Cont.	6.9 SCFM
Air Inlet	1/4-in. NPT
Min. Hose Size	3/8-in.
Weight	2.9 lbs.

CL1582 PISTOL GRIP NEEDLE SCALER

The CL1582 features a pistol grip design and is ideal for work on curved, uneven surfaces.

- Delivers 4,800 blows per minute
- Constructed with 19 heat treated needles



Needle Quantity	19
Needle Size	1/8-in.
Blows/Min.	4800
Air Consumption Avg.	8.3 SCFM
Air Consumption Cont.	18.4 SCFM
Air Inlet	1/4 in. NPT
Min. Hose Size	3/8-in.
Weight	4.3 lbs.

Reciprocating Saw

CL1540 RECIPROCATING SAW

The CL1540 reciprocating saw cuts through materials with ease. An excellent tool for body, exhaust and muffler work.

- Two blades included, 24T and 32T, to cut a variety of materials.
- Adjustable blade guard also acts as tool guide.



Strokes/min.	9,000
Stroke	0.4-in.
Air Consumption Avg.	2.2 SCFM
Air Consumption Cont.	8.6 SCFM
Air Inlet	1/4-in. NPT
Min. Hose Size	3/8-in.
Weight	1.4 lbs.


SR432303AV 09/12

Contact Us: Technical support available at 855-504-5678
www.campbellhausfeld.com
Nationwide network of service centers in U.S. and Canada



VEHICLE SERVICE

AIR TOOLS

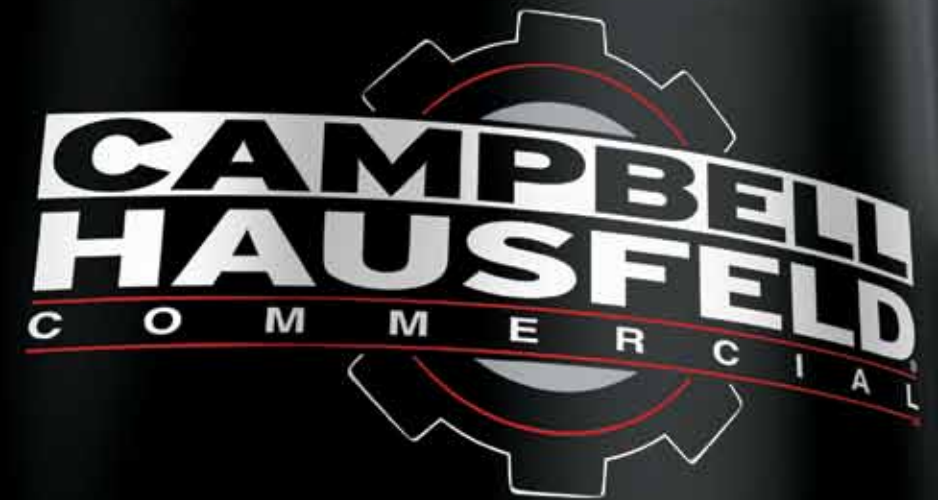

POWERED EQUIPMENT SINCE 1836



VEHICLE SERVICE

Impact Wrenches



CL1502 1/2 inch IMPACT WRENCH

The CL1502 is designed for everyday automotive, construction and farm work. The powerful pin clutch design provides 500 ft.-lbs. of maximum torque.

- One handed push button forward/reverse
- Built-in power regulator
- Rubber grip provides added comfort

CL1502	
Drive	1/2 in.
Working Torque	40-300 ft.-lbs.
Max Torque	500 ft.-lbs.
Impacts/Min.	1000
Air Consumption Avg.	5.1 SCFM
Air Consumption Cont.	28.6 SCFM
Air Inlet	1/4 in. NPT
Min. Hose Size	3/8 in.
Weight	6 lbs.



CL2502 1/2 inch IMPACT WRENCH

Designed for heavy duty automotive repair work, the CL2502 impact wrench delivers 625 ft.-lbs. of maximum torque. Removes the most stubborn nuts and bolts quickly and efficiently.

- Powerful and balanced twin hammer mechanism delivers smooth, balanced blows
- Integrated power regulator
- Rubber grip provides added comfort

CL2502	
Drive	1/2 in.
Working Torque	50-350 ft.-lbs.
Max Torque	625 ft.-lbs.
Impacts/Min.	1200
Air Consumption Avg.	5.1 SCFM
Air Consumption Cont.	28.6 SCFM
Air Inlet	1/4 in. NPT
Min. Hose Size	3/8 in.
Weight	6 lbs.



CL2556 EXTENDED ANVIL 1/2 inch IMPACT WRENCH

Designed for tire service, the CL2556 features a 2" extended anvil and delivers 625 ft.-lbs of maximum torque.

- Powerful and balanced twin hammer mechanism delivers smooth, balanced blows
- Integrated power regulator
- Rubber grip provides added comfort

CL2556	
Drive	1/2-in.
Working Torque	50-350 ft.-lbs.
Max Torque	625 ft.-lbs.
Impacts/Min.	1200
Air Consumption Avg.	5.1 SCFM
Air Consumption Cont.	28.6 SCFM
Air Inlet	1/4 in. NPT
Min. Hose Size	3/8-in.
Weight	6.3lbs.



VEHICLE SERVICE

Drills



CL1545 3/8 inch REVERSIBLE DRILL

Use this reversible 3/8" drill for general drilling, honing, and hole-sawing tasks. Features keyless chuck for easy bit replacement.

- Quick reverse lever to easily change rotation
- Rubber grip for added comfort
- Lightweight and compact

CL1545	
Chuck Size	3/8-in.
Free Speed RPM	2000
Air Consumption Avg.	11.2 SCFM
Air Consumption Cont.	32 SCFM
Air Inlet	1/4-in. NPT
Min. Hose Size	3/8-in.
Weight	2.6 lbs.



CL1546 1/2 inch REVERSIBLE DRILL

The CL1546 is an excellent choice when using larger bits and accessories. With its powerful air motor, it's ideal for drilling large holes.

- No-load speed of 800 RPM
- Rubber grip for added comfort

CL1546	
Chuck Size	1/2-in.
Free Speed RPM	800
Air Consumption Avg.	15.2 SCFM
Air Consumption Cont.	33.7 SCFM
Air Inlet	1/4-in. NPT
Min. Hose Size	3/8-in.
Weight	3.2 lbs.

Screwdriver



CL1575 AIR SCREWDRIVER

The CL1575 is a high RPM impacting screwdriver designed for speed and productivity.

- Quick change chuck for 1/4" hex bits
- Compact design with hanger hook
- Built-in power regulator

CL1575	
Drive	1/4-in.
Working Torque	75 - 120-in.lbs.
Max Torque	300-in.lbs.
Free Speed	10,500 RPM
Air Consumption Avg.	2.8 SCFM
Air Consumption Cont.	9.3 SCFM
Air Inlet	1/4-in. NPT
Min. Hose Size	3/8-in.
Weight	1.5 lbs.



VEHICLE SERVICE

Sanders



CL1504 6 Inch DUAL ACTION SANDER

This dual action sander is ideal for general sanding and body work. Use for feather edging, surface preparation, and finish work.

- Ball bearing construction for smooth performance and long life
- Spins at 10,000 RPM, 3/8 in. orbit
- Built-in regulator for speed control

CL1504	
Pad Size	6-in.
Spindle Thread	5/16-24
Free Speed RPM	10,000
Air Consumption Avg.	16.5 SCFM
Air Consumption Cont.	23.1 SCFM
Air Inlet	1/4-in. NPT
Min. Hose Size	3/8-in.
Weight	3.5 lbs.

CL1565 RANDOM ORBITAL SANDER- 5 Inch PAD

The CL1565 produces a swirl-free fine finish and is a great tool for surface preparation.

- Soft palm grip for operator comfort
- Lightweight, composite housing design
- Single lever variable speed regulator

CL1565	
Pad Size	5-in.
Spindle Thread	5/16-24
Free Speed RPM	10,000
Air Consumption Avg.	13.7 SCFM
Air Consumption Cont.	19.6 SCFM
Air Inlet	1/4 in. NPT
Min. Hose Size	3/8-in.
Weight	1.8 lbs.

CL1567 RANDOM ORBITAL SANDER- 6 Inch PAD

The CL1567 produces a swirl-free fine finish and is a great tool for surface preparation.

- Soft palm grip for operator comfort
- Lightweight, composite housing design
- Single lever variable speed regulator

CL1567	
Pad Size	6-in.
Spindle Thread	5/16-24
Free Speed RPM	10,000
Air Consumption Avg.	13.7 SCFM
Air Consumption Cont.	19.6 SCFM
Air Inlet	1/4-in. NPT
Min. Hose Size	3/8-in.
Weight	1.8 lbs.



VEHICLE SERVICE

Heavy-Duty Impact Wrenches



CL1586 3/4 inch IMPACT WRENCH

The CL1586 delivers 1,100 ft-lbs of maximum torque. This tool is ideal for work on trucks, farm and heavy duty equipment.

- Powerful pin clutch impact mechanism
- One handed push button forward / reverse
- Built-in power regulator

CL1586	
Drive	3/4 in.
Working Torque	200-750 ft.-lbs.
Max Torque	1100 ft.-lbs.
Impacts/Min.	650
Air Consumption Avg.	6.1 SCFM
Air Consumption Cont.	34.2 SCFM
Air Inlet	1/4 in. NPT
Min. Hose Size	3/8 in.
Weight	10.5 lbs.



CL2559 1inch TWIN HAMMER IMPACT WRENCH

This 1 inch impact tool has a compact, pistol grip design to help you get into tight spaces. With 1,450 ft-lbs of maximum torque, the CL2559 has the power to remove stubborn nuts and bolts on trucks, trailers, and other large vehicles.

- Twin hammer impact mechanism is balanced and powerful
- Handle exhaust directs air away from operator and workspace.
- Built-in power regulator

CL2559	
Drive	1 in.
Working Torque	200-850 ft.-lbs.
Max Torque	1450 ft.-lbs.
Impacts/Min.	850
Air Consumption Avg.	15.4 SCFM
Air Consumption Cont.	85.4 SCFM
Air Inlet	3/8 in. NPT
Min. Hose Size	1/2 in.
Weight	13 lbs.



CL2157 1inch HEAVY DUTY IMPACT WRENCH

The CL2157 is our most powerful impact wrench, it delivers 1,650 ft-lbs of nut busting torque.

- Twin hammer impact mechanism is balanced and powerful
- Side handle for better control
- Built-in power regulator

CL2157	
Drive	1 in.
Working Torque	200-1,250 ft.-lbs.
Max Torque	1650 ft.-lbs.
Impacts/Min.	900
Air Consumption Avg.	16.4 SCFM
Air Consumption Cont.	91.3 SCFM
Air Inlet	1/2 in. NPT
Min. Hose Size	1/2 in.
Weight	24 lbs.

VEHICLE SERVICE

Air Ratchets

CL1501 3/8 inch RATCHET

The CL1501 delivers 55 ft.-lbs. of torque to install fasteners in tight compartments. Ideal for automotive engine repair work.

- Rubber grip for added comfort
- Heat treated ratcheting components for increased durability

CL1548 1/2 inch RATCHET

Need extra torque? The CL1548 delivers 90 ft.-lbs. of torque to handle large fasteners on engines and heavy machinery.

- The extra long handle provides additional leverage
- Heavy duty head design for durability and longer life

CL1501	
Drive	3/8 in.
Working Torque	10-45 ft.-lbs.
Max Torque	55 ft.-lbs.
Free Speed RPM	155
Air Consumption Avg.	4.8 SCFM
Air Consumption Cont.	19.2 SCFM
Air Inlet	1/4 in. NPT
Min. Hose Size	3/8 in.
Weight	2.5 lbs.

CL1548	
Drive	1/2 in.
Working Torque	10-75 ft.-lbs.
Max Torque	90 ft.-lbs.
Free Speed RPM	150
Air Consumption Avg.	8 SCFM
Air Consumption Cont.	32 SCFM
Air Inlet	1/4 in. NPT
Min. Hose Size	3/8 in.
Weight	4.3 lbs.

Rivet Tools

CL1539 RIVET GUN

The CL1539 is ideal for automotive and construction assembly work. The hardened steel jaws set rivets in steel up to 3/16-in thick.

- 2,000 lbs of pull for tough jobs
- Four nose pieces included: 3/32, 1/8, 5/32, and 3/16 inch.
- Effortless trigger action eases the repetitive action of popping rivets

CL1539	
Rivet Sizes	3/32, 1/8, 5/32, 3/16 in.
Pulling Power	2000 lbs.
Air Consumption Avg.	0.2 SCFM
Air Consumption Cont.	1.1 SCFM
Air Inlet	1/4 in. NPT
Min. Hose Size	3/8 in.
Weight	3.5 lbs.

VEHICLE SERVICE

Grinders

CL2521 DIE GRINDER

This powerful air tool is ideal for deburring, polishing and grinding. The contoured rubber grip provides comfort during use.

- Adjustable exhaust deflector
- Safety latch throttle lever
- Includes 1/4 in. and 1/8 in. collets

CL2541 ANGLE DIE GRINDER

The CL2541 features a right-angle head for easier access into tight spaces. The contoured rubber grip provides comfort during use.

- Adjustable exhaust deflector
- Safety latch throttle lever
- Includes 1/4-in. and 1/8-in. collets

CL1555 5 INCH ANGLE GRINDER

This angle grinder is an excellent choice for weld preparation, rust removal and deburring. The aluminum alloy housing is rugged and lightweight.

- Powerful air motor spins at 11,000 RPM for fast removal of material
- Safety latch throttle lever
- Side handle for better control

CL2521	
Collet Size	1/4 in.
Rated Power	.45 HP
Free Speed RPM	22,000
Air Consumption Avg.	12.5 SCFM
Air Consumption Cont.	28.8 SCFM
Air Inlet	1/4 in. NPT
Min. Hose Size	3/8 in.
Weight	1.4 lbs

CL2541	
Collet Size	1/4 in.
Rated Power	.45 HP
Free Speed RPM	18,000
Air Consumption Avg.	12.8 SCFM
Air Consumption Cont.	29.5 SCFM
Air Inlet	1/4 in. NPT
Min. Hose Size	3/8 in.
Weight	1.6 lbs.

CL1555	
Spindle Thread	3/8-in.-24
Rated Power	.6 HP
Free Speed (RPM)	11,000
Air Consumption Avg.	11 SCFM
Air Consumption Cont.	18.4 SCFM
Air Inlet	1/4 in. NPT
Min. Hose Size	3/8-in.
Weight	4.5 lbs.

Tire Buffer

CL2522 LOW SPEED TIRE BUFFER

The CL2522 is ideal for tire patch preparation and cleaning tire moldings.

- Quick change slip chuck
- Adjustable speed control
- Adjustable exhaust deflector

CL2522	
Chuck	3/8-in.
Rated Power	.45 HP
Speed RPM	2,500
Air Consumption Avg	18.6 SCFM
Air Consumption Cont.	31 SCFM
Inlet Size	1/4-in.
Weight	2.2 lbs.