

APPROVAL/APPROBATION: _____

DATE: / /

DIMENSIONS: In [mm]
DATE: 2008/09/20

NOTES:
*PLEASE PROVIDE SAMPLE OF
OFF-WHITE FINISH

CUSTOM DIVISION TECHNICAL SHEET
FICHE TECHNIQUE DIVISION SUR MESURE

PROD.: EC44594C

TYPE: SUSPENSION/ PENDANT FIXTURE

SOURCE LUMINEUSE / LIGHT SOURCE


INC/ MED/ A19/ 100W X (4)

VOLTAGE: 120V

WATTS / AMP.: 200W

NO.	FINI / FINISH	DESCRIPTION
A	OFF-WHITE	CANOPY
B	S C	STEMS
C	FRO	GLASS SHADES
D	BLK	CURLY CORD



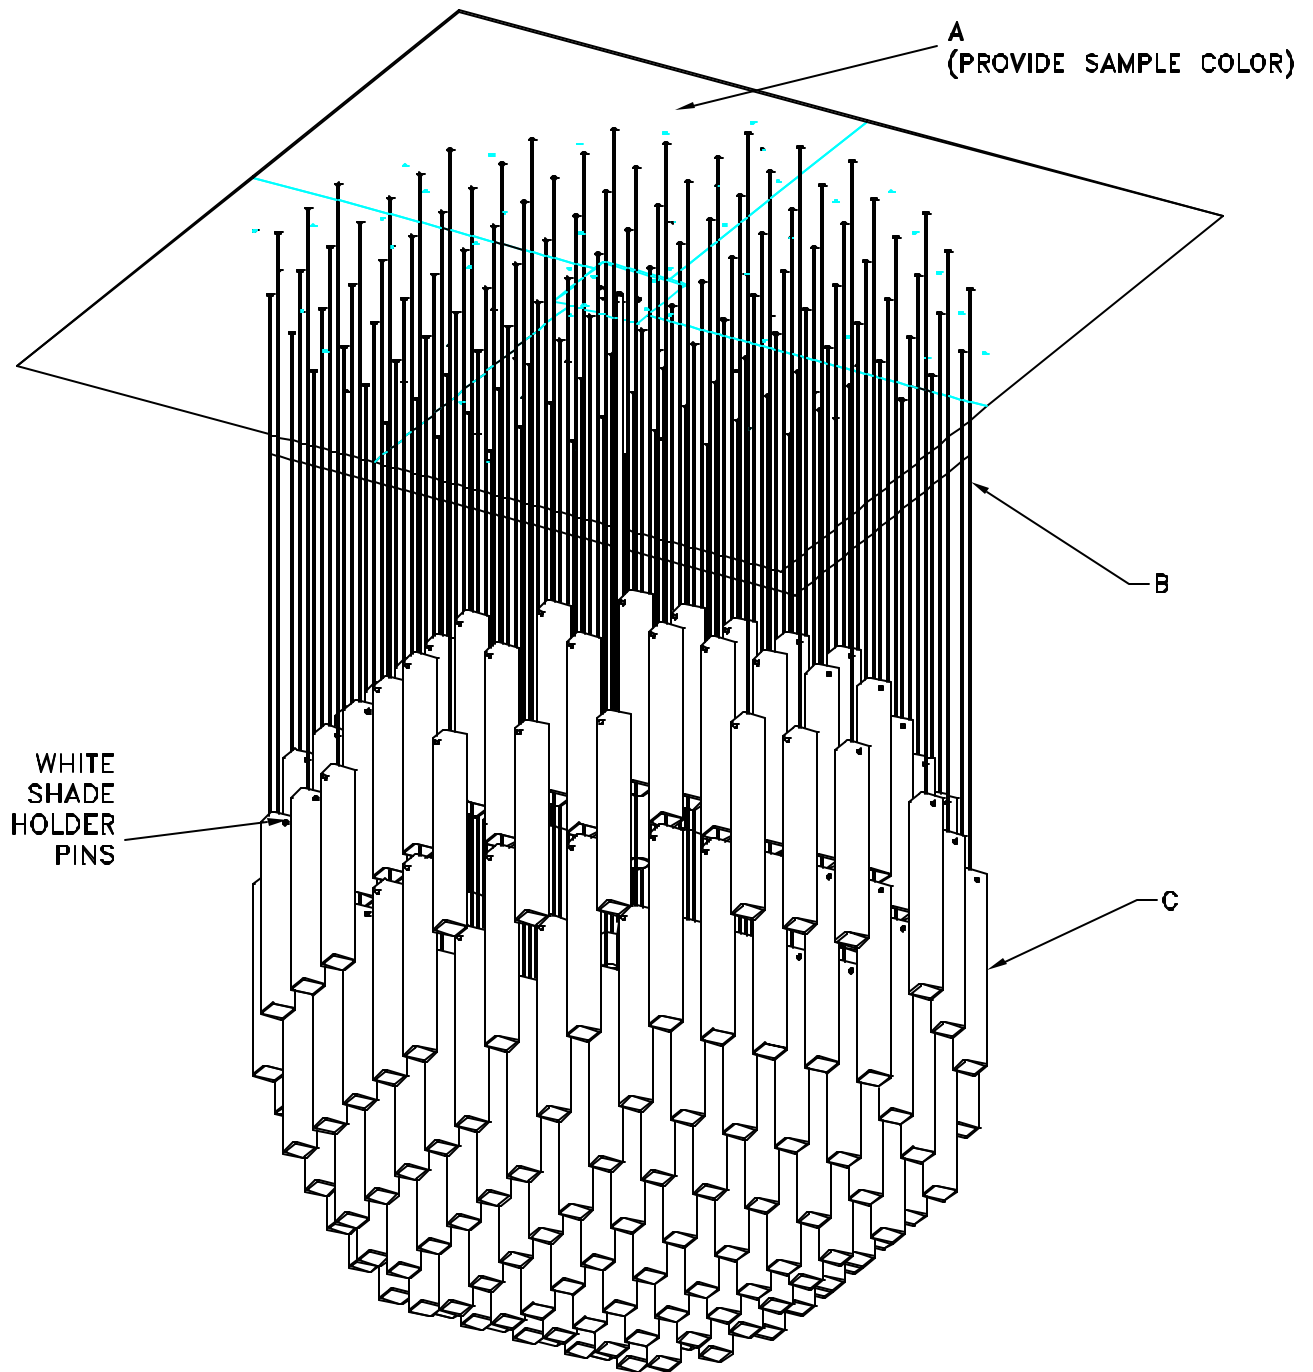

APPROVAL/APROBATION: _____

DATE: / /

DIMENSIONS: In [mm]
DATE: 2006/09/20

NOTES: *PLEASE PROVIDE SAMPLE OF
OFF-WHITE FINISH

CUSTOM DIVISION TECHNICAL SHEET
FICHE TECHNIQUE DIVISION SUR MESURE

PROD.: EC44594C

TYPE: SUSPENSION/ PENDANT FIXTURE

SOURCE LUMINEUSE / LIGHT SOURCE

INC/ MED/ A19/ 100W X (4)

VOLTAGE: 120V

WATTS / AMP.: 200W

NO.	FINI / FINISH	DESCRIPTION
A	OFF-WHITE	CANOPY
B	S C	STEMS & COUNTER WEIGHT
C	FRO	GLASS SHADES
D	BLK	CURLY CABLE



PAGE :2 OF 2




EUREKA 225 DE LIÈGE W. # 200, MONTRÉAL (QUÉBEC) CANADA H2P 1H4 TEL: (514)385-3515 FAX: (514)385-4169 eurekaillighting.com

TRIANGULAR STRUCTURE POSITIONING

- ASSEMBLE STRUCTURE AS SHOWN WITH SUPPLIED HARDWARE, FOLLOW LABELED INDICATIONS.
- START WITH (1-2) THEN (2-3),(3-4),(4-1).
- INSTALL CENTERED IN RECESSED CEILING. SEE STEP 1 OF INSTALLATION DRAWINGS

 C US	LUMINAIRE		 EUREKA
	LR94764		
<hr/>			
W / A :	200W		
VOLT :	120V	AC	
MOD :	EC44594C-CANAPÉ		
DATE :	2006/12/07		

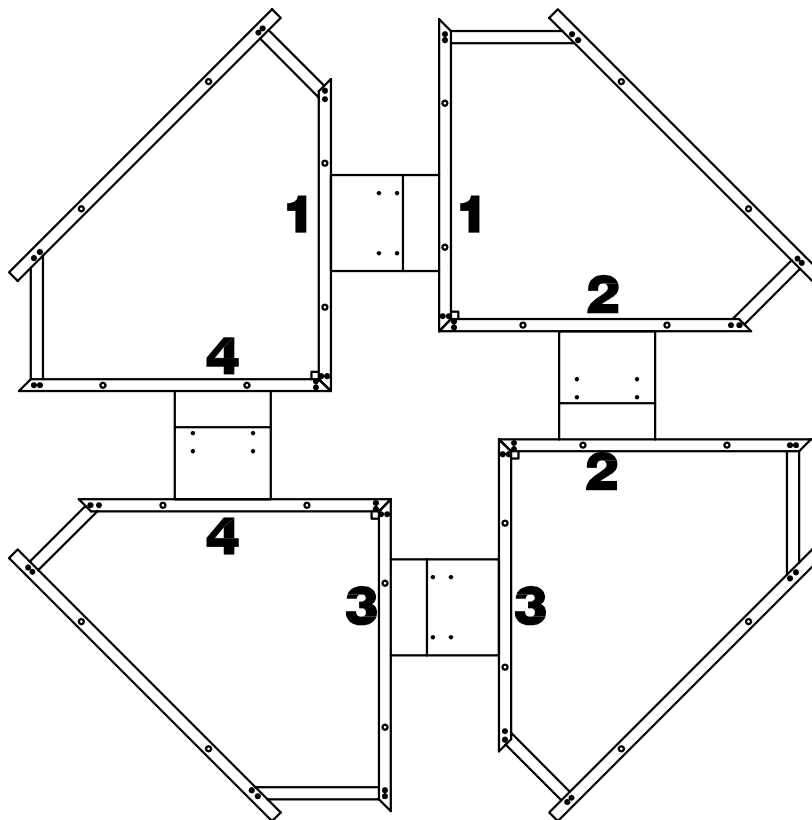

DATE: 2003/01/14



NOTES: + - 850 LBS.



CUSTOM DIVISION INSTALLATION SHEET
FICHE D'INSTALLATION DIVISION SUR MESURE

PROD.: C44594C


TYPE: SUSPENSION / PENDANT FIXTURE

1. - INSTALL 4 TRIANGULAR STRUCTURES ONTO CEILING WITH 6 X $\frac{1}{8}$ " SOLID FULL THREADED RODS (BY OTHERS) PER STRUCTURE & USE 2 NUTS PER ROD. (SEE DETAIL B)
 - INSTALL MOUNTING PLATES WITH 11 X #8-32 COUNTERSUNK SCREWS PER PLATE. (4 STUDS WILL BE ASSEMBLED TO EACH TRIANGULAR STRUCTURE(4) TO HELP ALIGN THE PLATES(4). PLATES ARE TO BE FASTENED IN PLACE WITH NUTS ON THE 4 STUDS AND LATER REPLACED WITH COUNTERSINK SCREWS AFTER THE OTHER 9 HAVE BEEN ASSEMBLED.)

		LUMINAIRE		
		LR94764		EUREKA
<hr/>				
W / A :	200W			
VOLT :	120V	AC		
MOD :	EC44594C			
DATE :	2006/09/20			

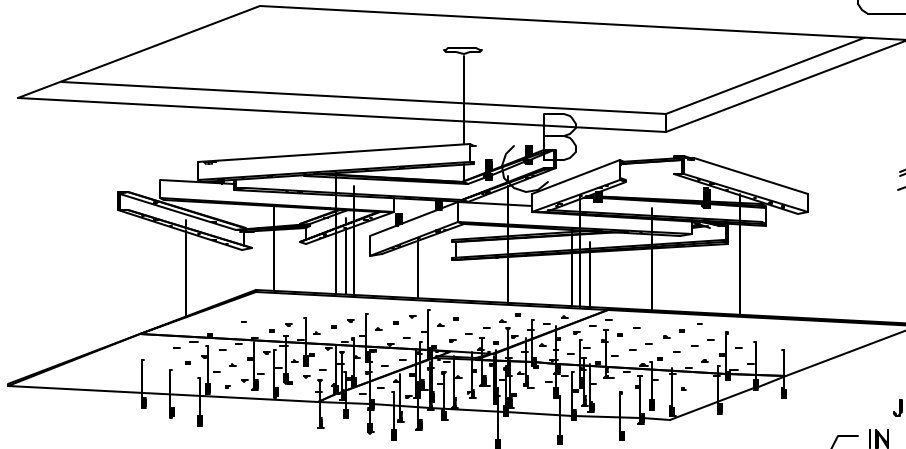

JUNCTION BOX (BY OTHERS)
 IN THE CENTER OF 6FT. X 6FT.
 RECESSED CANOPY

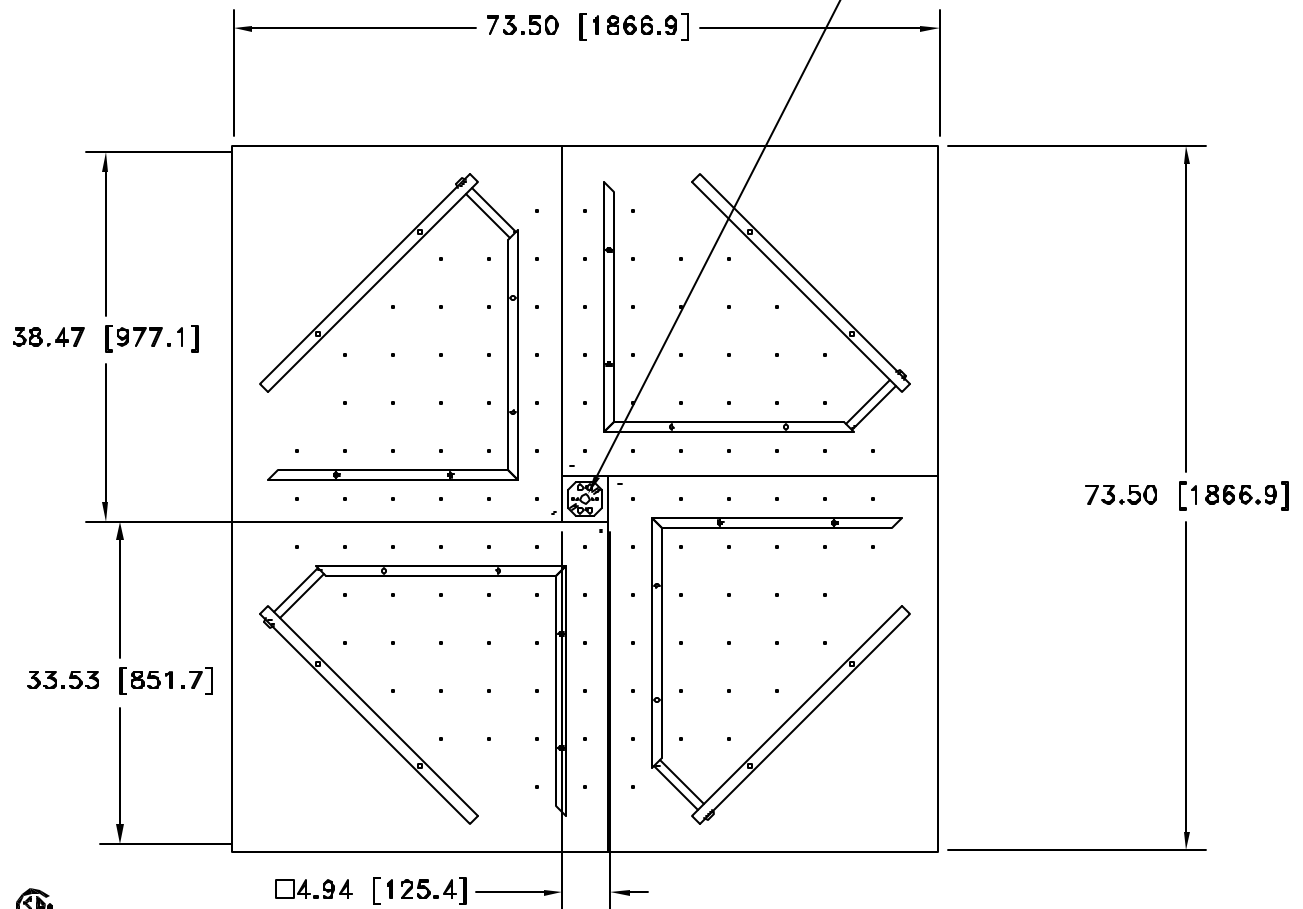

DATE: 2006/09/20

NOTES: + - 850 LBS.
 *INSTALLTION STEPS MY VARY, AN
 UPDATED INSTALLATION SHEET WILL BE
 PROVIDED UPON DELIVERY.

CUSTOM DIVISION INSTALLATION SHEET
 FICHE D'INSTALLATION DIVISION SUR MESURE

PROD.: EC44594C



TYPE: SUSENTIPN/ PENDANT FIXTURE




EUREKA 225 DE LIÈGE W. # 200, MONTRÉAL (QUÉBEC) CANADA H2P 1H4 TEL.: (514)385-3515 FAX: (514)385-4169 eurekaillighting.com

PAGE :1 OF 3

2. CENTRAL STEM INSTALLATION
- MAKE ELECTRICAL CONNECTIONS BETWEEN CENTRAL STEM ASSEMBLY AND JUNCTION BOX
 - INSTALL 8" X 8" COVER PALTE WITH (4) #8-32 COUNTERSINK SCREWS
 - INSERT 4 X 100W - A19 BULBS
 - INSTALL GLASS SHADE WITH PROVIDED PINS

	LUMINAIRE		
	LR94764		
<hr/>			
W / A :	200W		
VOLT :	120V	AC	
MOD :	EC44594C		
DATE :	2006/09/20		

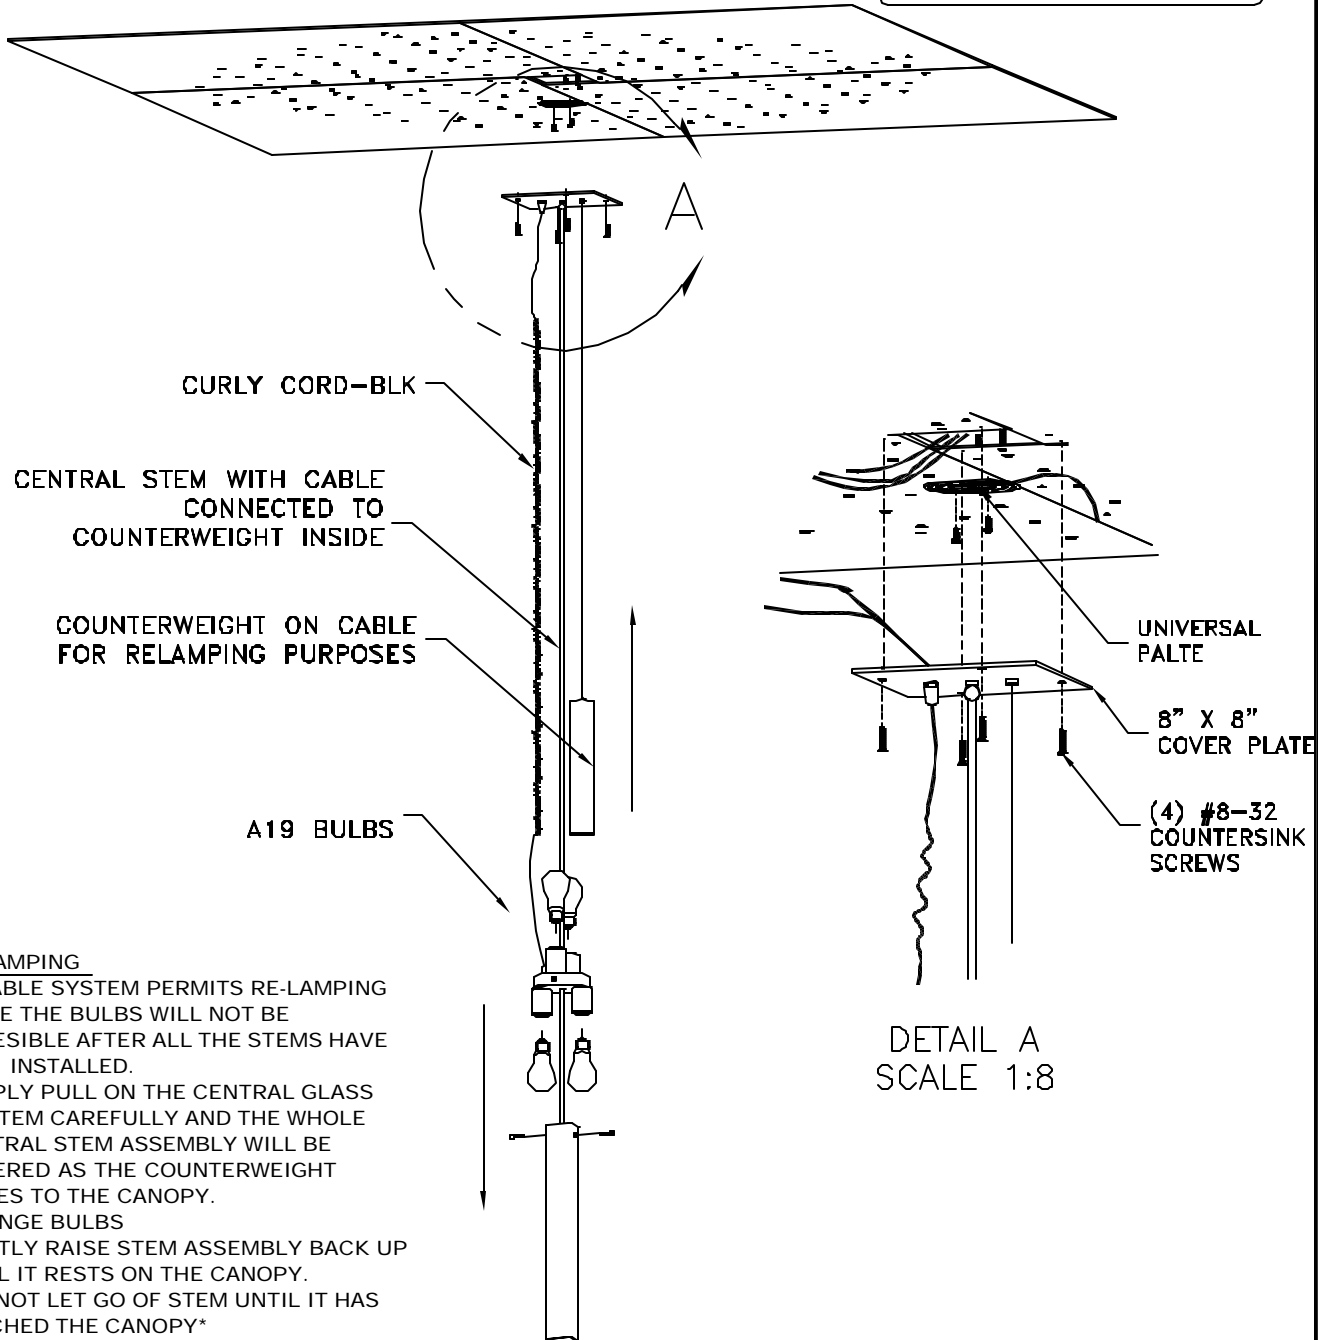

RE-LAMPING

- A CABLE SYSTEM PERMITS RE-LAMPING SINCE THE BULBS WILL NOT BE ACCESIBLE AFTER ALL THE STEMS HAVE BEEN INSTALLED.
- SIMPLY PULL ON THE CENTRAL GLASS OR STEM CAREFULLY AND THE WHOLE CENTRAL STEM ASSEMBLY WILL BE LOWERED AS THE COUNTERWEIGHT RAISES TO THE CANOPY.
- CHANGE BULBS
- GENTLY RAISE STEM ASSEMBLY BACK UP UNTIL IT RESTS ON THE CANOPY.
- *DO NOT LET GO OF STEM UNTIL IT HAS REACHED THE CANOPY*



DATE: 2006/09/20

NOTES: +-850 LBS.

*INSTALLTION STEPS MY VARY, AN UPDATED INSTALLATION SHEET WILL BE PROVIDED UPON DELIVERY.

CUSTOM DIVISION INSTALLATION SHEET
FICHE D'INSTALLATION DIVISION SUR MESURE

PROD.: EC44594C



TYPE: SUSENTIPN/ PENDANT FIXTURE


PAGE :2 OF 3



EUREKA 225 DE LIEGE W. # 200, MONTRÉAL (QUÉBEC) CANADA H2P 1H4 TEL: (514)385-3515 FAX: (514)385-4169 eurekaillighting.com

3. - INSTALL 120 STEMS BY SCREWING THEM INTO THE COUPLING ALREADY ASSEMBLED TO THE CANOPY PLATES. MATCH THE NUMBERS ON STEMS WITH NUMBERS ON THE CANOPY PLATES. THERE ARE 6 DIFFERENT LENGTHS OF STEMS. (TIGHTEN STEMS VERY WELL WITH PLIERS. GRIP PLIERS NEAR THE BOTTOM OF STEMS WHERE GLASS SHADES WILL HIDE DAMAGE DONE, IF ANY).
- INSTALL (180) GLASS SHADES ON STEMS
 - START BY ASSEMBLING THE LONGEST STEMS CLOSEST TO THE CENTRAL STEM AND WORK OUTWARDS

	LUMINAIRE LR94764	
W / A : 200W		
VOLT : 120V AC		
MOD : EC44594C		
DATE : 2006/09/20		

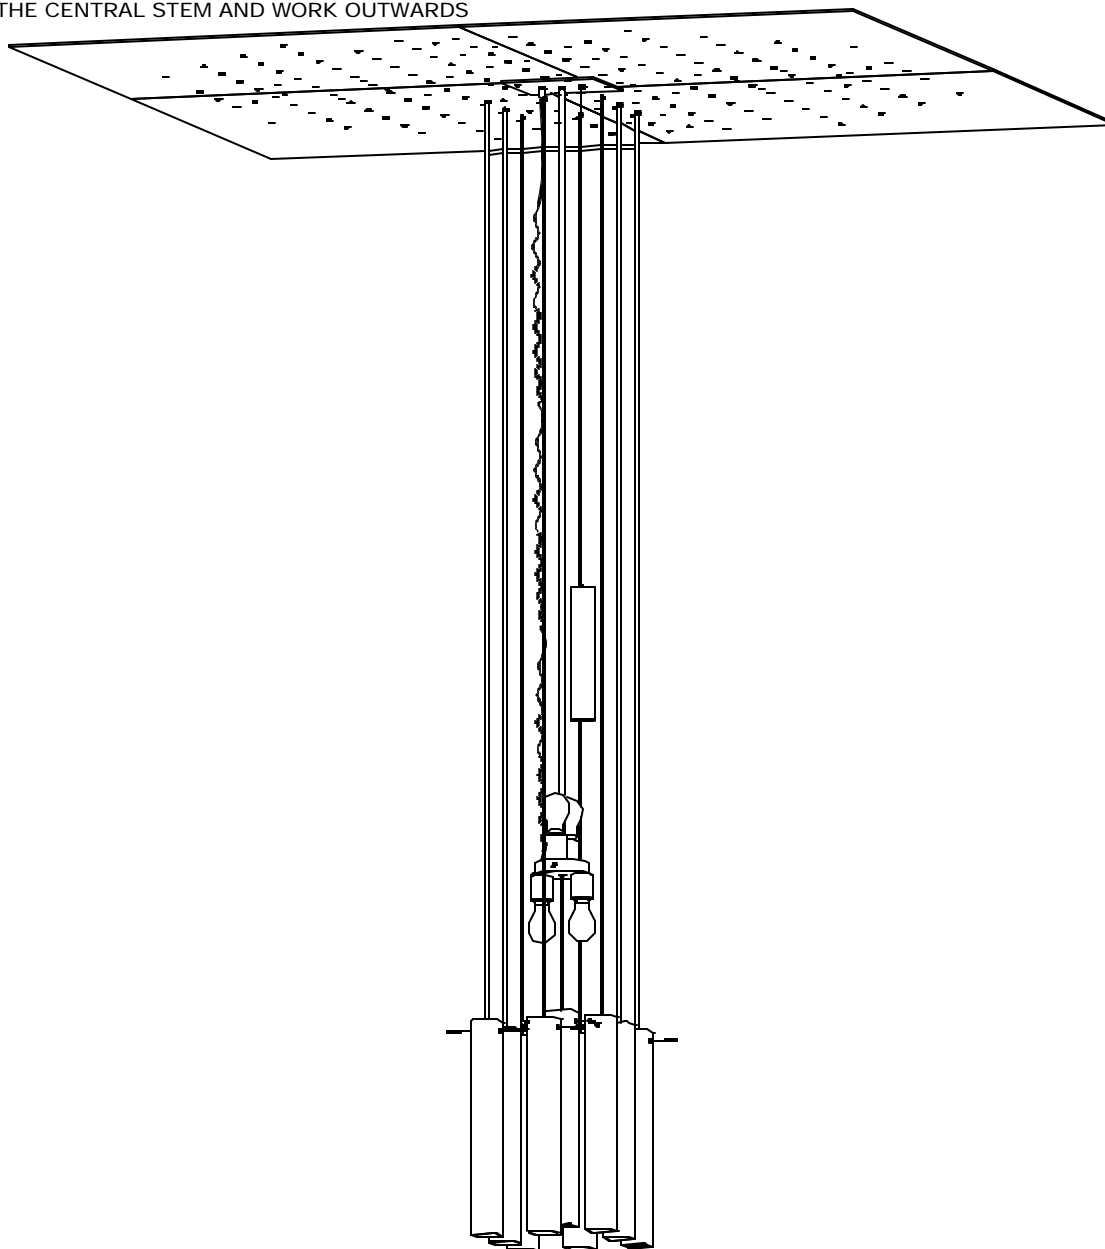

DATE: 2006/09/20

NOTES: +-850 LBS.
*INSTALLTION STEPS MY VARY, AN
UPDATED INSTALLATION SHEET WILL BE
PROVIDED UPON DELIVERY.

CUSTOM DIVISION INSTALLATION SHEET
FICHE D'INSTALLATION DIVISION SUR MESURE

PROD.: EC44594C

TYPE: SUSENTIPN/ PENDANT FIXTURE



EUREKA 225 DE LIÈGE W. # 200, MONTRÉAL (QUÉBEC) CANADA H2P 1H4 TEL: (514)385-3515 FAX: (514)385-4169 eureka-lighting.com