

JBOX SOLIDRIVE

2-7 CHANNEL

HIVE SERIES



2 to 3 Channels 17.83"L x 15"W x 4.17"D



DESCRIPTION


The HIVE™ JB-SoliDrive features a surface or plenum rated recessed mount, high quality metal junction box in a 2 to 7 channel configuration. The SoliDrive comes pre-wired with a UL listing for time-saving installation and virtual pass-through final inspection.

Our 0-10V dimming delivers smooth flicker-free linear dimming down to 1% with most LED's and a wide variety of compatible dimmers.

With universal input voltage ranging from 120 to 277VAC, the SoliDrive series of drivers is designed for commercial, industrial and residential applications.

FEATURES

- Pre-WiredSurfaceOrRecessedJ-BoxWithUpTo 7 Channels
- Universal Input Voltage
- 0-10V Dimmable Flicker Free Down To 1% (Optional)
- Ripple Free
- No Minimum Load Requirement
- UL 8750, Class 2
- Auto-Reset Protection For Short Circuit & Overheat
- Over Load Protection CC Mode

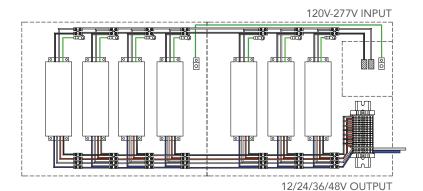























Enclosure Unit, 100W C2 Power Supplies, Wire & Components	\$1,200	\$1,850 MSRP	\$450
Configuration, Internal Mounting, Wiring @\$250/Hour	\$2,000	\$0	(\$2,000)
Termination & Low Voltage Hookups, Inspection @\$250/Hour	\$750	\$250	(\$500)
TOTAL SYSTEM COST / SAVINGS	\$3,950	\$2,100	(\$1,850)

MODEL NO.	MAX OUTPUT POWER	VOLTAGE IN	VOLTAGE OUT	EFFICIENCY @ MAX LOAD	THD @ MAX LOAD	POWER FACTOR @ MAX LOAD	ENVIRONMENT	0-10V DIMMING
HIVE-JB-SOLIDRIVE	672W	120-277 VAC	12/24V/36/48 DC	>87%	<20%	>0.95	IP21 INDOOR	YES