


# Steps

Loosen and place  
foot inside the Chassis



1

Pull Tight

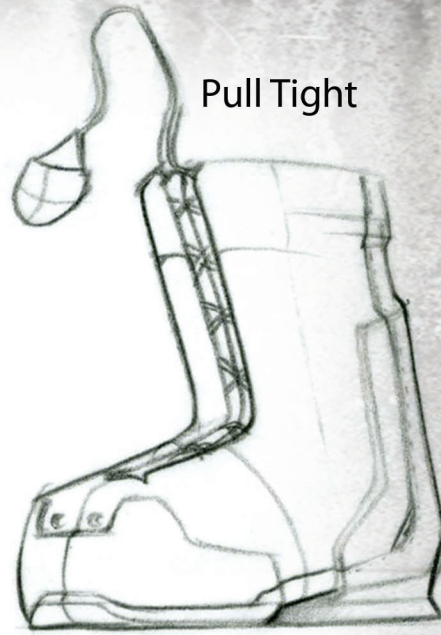


2

Park and Pipe



MORE FLEXIBLE  
LESS SUPPORT - PARK  
HOLD PIPE

Choose external  
tongue that fits  
your riding preference.

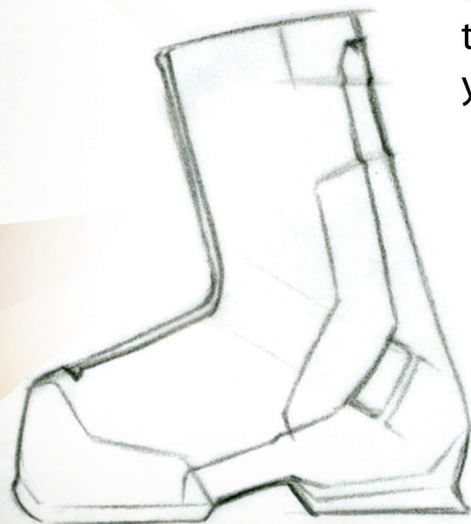

+

OR

=

3

Downhill



WRAPS AROUND  
HIGH BACK  
MORE STIFFNESS  
& SUPPORT - DOWNHILL

# Integrated into Sole

