

TAYLOR
Tools Chefs Trust



Professional Products

Food Service & Test
Instruments

2015

The Taylor® Advantage

Best Quality.

Precision measurement has been the exclusive focus of our business for 150 years. Our ability to fulfill the professional market's exacting standards for accuracy, durability, and design is built on a legacy of technical expertise, quality materials and a constant awareness of changing industry needs.

Best Selection.

The diversity of our product line reflects an ongoing commitment to provide the best solutions to the food service and professional community at every level... with ever-expanding choices in specialized temperature and weight measurement instruments that promote food safety, enhanced productivity and user convenience.

One Source.

We're the Food Service and Professional industry's most complete source for both thermometers and scales. So to simplify your purchasing process, plus improve your choices, quality and value...take advantage of The Taylor Advantage. We've got everything you need.



Table of Contents

1" Standard Grade Dial Instant Read Thermometers	Page 3
1" Superior Grade Dial Instant Read Thermometers	Page 3
2" Superior Grade Dial Bi-Therm® Thermometers	Page 4
1 3/4" Superior Grade Dial Bi-Therm® Thermometers	Page 4
Temp-Taker™	Page 4
Hand Held Thermocouple Thermometers	Page 5
K-Type Probes for Thermocouple Thermometers	Page 6
Infrared Thermometers	Page 6
Pocket Digital Thermometers	Page 7-8
Roast/Meat Thermometers	Page 8
Floating Thermometer	Page 9
Cooking Thermometers	Page 9
Candy & Deep-Fry Thermometers	Page 10
Oven/Grill Thermometers	Page 11
Refrigerator/Freezer Thermometers	Page 12-13
HACCP Food Safety Items	Page 14-16
Special Use Thermometers/Strips	Page 17
Panel Mount Digital Thermometer	Page 18
TruTemp® Thermometers	Page 18-19
Large Dial Thermometers and Clocks	Page 20
Window/Wall Thermometers	Page 20-21
Max/Min Thermometers	Page 22
Pocket Case Thermometers	Page 22
Mechanical Timers	Page 23
Digital Timers	Page 23-24
Economical Digital Scales	Page 24
Electronic Portion Control Scales with Stainless Steel Platform	Page 25-26
Analog Portion Control Scales with Stainless Steel Chassis	Page 26-27
Analog Portion Control Scales with Dashpot	Page 27
Heavy Duty Mechanical Scales	Page 27
Compact Analog Portion Control Scales	Page 27
Receiving Scales	Page 28
Hanging Scales	Page 28
Accessories	Page 29
Replacement Parts for Model 9405/9400	Page 29
Miscellaneous Parts and Supplies	Page 29
Houdini Wine Accessories	Page 30-31
Hotel & Resort Products	Page 32
Index of Products by Name	Page 33-36
Company Terms & Conditions	Page 37


Taylor® Takes Temperature Seriously

A failure in your food safety practices can put you out of business and a Hazard Analysis Critical Control Point (HACCP) program is the best way to protect your business from this risk. This program takes a look at how food is handled from truck to table, and the temperature safety standards that are defined by the USDA. With more than 150 years of expertise in product development and manufacturing,

Taylor's instruments are accurate and easy to use with minimal training, so even the newest crew member can use them reliably in a HACCP program. This catalog contains some of Taylor's products for food service use. If you would like to learn more, or if you have any questions about HACCP or food safety temperature standards, just ask your Taylor representative, or give us a call at 1.800.225.4834.

Instant Read Dial Thermometers

1" Standard Grade Dial Instant Read Thermometers

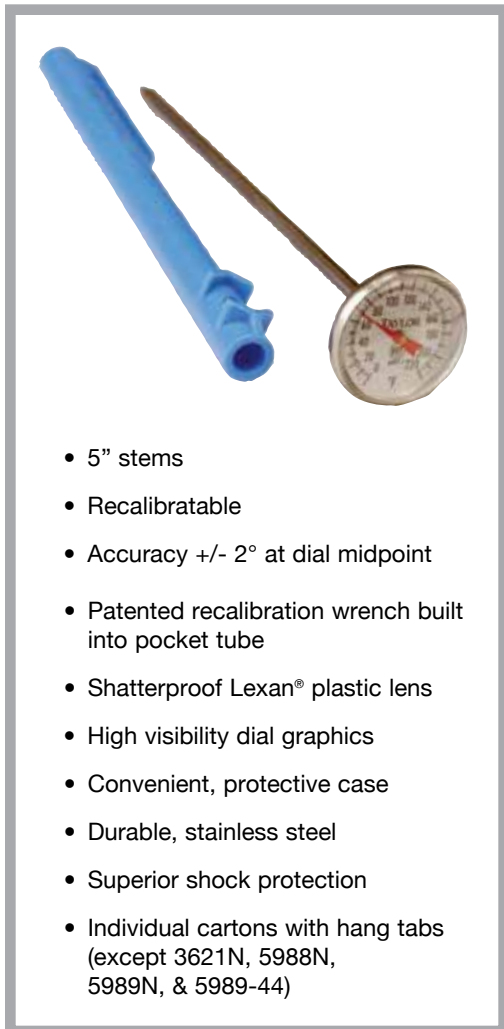

- 5" stems
- Recalibratable
- Accuracy +/- 2° at dial midpoint
- Patented recalibration wrench built into pocket tube
- Shatterproof Lexan® plastic lens
- High visibility dial graphics
- Convenient, protective case
- Durable, stainless steel
- Superior shock protection
- Individual cartons with hang tabs (except 3621N, 5988N, 5989N, & 5989-44)

3621N

0°F/220°F anti-microbial case. Blister Card.

5988N

50°F/550°F. Blister Card.

5989N

0°F/220°F. Blister Card. NSF listed.

5989-44 International Series
-14°C/105°C.

0°F/220°F. NSF listed.

6065N

-40°C/70°C.

6091N

-40°F/120°F.

6092N

0°F/220°F. GloTherm. NSF listed.

6093N

50°F/550°F.

6094N

-40°C/50°C.

6096N

-40°F/160°F. GloTherm.

6099N

-10°C/110°C.



Exclusive Safe-T-Set Calibration System

All 1" models have a protective pocket case which doubles as a calibration tool.



1" Superior Grade Dial Instant Read Thermometers

- 5" stems
- Recalibratable
- Accuracy +/- 2°F/1°C of entire range
- 3 point calibration
- Patented recalibration wrench built into pocket tube
- Shatterproof Lexan® plastic lens
- High visibility dial graphics
- Convenient, protective case
- Durable, stainless steel
- Superior shock protection
- Individual cartons with hang tabs

6071

-40°F/120°F

6075

25°F/125°F

6072N

0°F/220°F

6076J

-40°F/160°F

6073J

50°F/550°F

6079J

-10°C/110°C

2" Superior Grade Dial Bi-Therm® Thermometers



- 8" stems
- Recalibratable
- 3 point calibration
- Accuracy +/- 2° of entire range
- "Human-engineered" dial graphics
- Stainless steel external parts
- Extended scale design
- Packed in individual boxes

6211J
-40°F/120°F.

6215J
0°F/220°F.

6212J
25°F/125°F.

6220J
50°F/550°F.

6223
25°F/125°F.
0°C/50°C.

6235J
-10°C/110°C,
1°C divisions.

1 3/4" Superior Grade Dial Bi-Therm® Thermometers



- 8" stems
- Recalibratable
- Accuracy +/- 2° of entire range
- 3 point calibration
- High visibility dial graphics
- Anti-parallax dial/case design
- Stainless steel external parts
- Extended scale design
- Superior shock protection
- Packed in individual boxes (except 8215N)

8212J
25°F/125°F.

8220J
50°F/550°F.

8215N
0°F/220°F
-10°C/110°C
Blister Carded.
Vessel clip
included.
NSF listed.

8238J
0°C/250°C,
2°C divisions.

Temp-Taker™

9829

Temp-Taker™ HACCP Food Safety Solution is an automated temperature recording data logger with pre-programmed HACCP Menu Plan and HACCP Control Points. Temp-Taker™ consists of: Temp-Taker™ Type K Recording Thermocouple; Type K food insertion probe with 1.50mm diameter tip; Temp-Taker™ Software CD; USB Cable and AC Adapter; Safe-T-Guard™ sanitizing tube. 3AA batteries included.



Hand Held Thermocouple Thermometers



9306N
Splash-Proof Dual Temp Infrared Thermometer with Fold Out Thermocouple Step Down Probe.

HACCP pass/fail light system. Min/max/hold features. IP65 rated. Adjustable Emissivity. D:S=3.1.

Thermocouple range:

-67°/626°F and -55°/330°C.

Infrared range: -67°/482°F and

-55°/250°C. Thermocouple

accuracy from 14° to 149°F (-10° to 65°C) +/- 1°F (0.6°C).

Infrared accuracy from 32°F to 149°F (0°C to 65°C). +/- 2°F (1°C).

Resolution 0.5°F or 0.2°C. Auto shut off. Two AAA batteries included.



9405
High Accuracy Waterproof K-Type Thermocouple Thermometer.

With 2-second response probe on a 4 ft. cord.

+/- 1° over HACCP range, recalibratable by front panel switches, auto-off feature.

9 volt battery included.

Temperature range:

-40°F/500°F or -40°C/260°C.



9532
K-Type Thermocouple Plus Infrared Thermometer.

Compact size. Oversized split LCD. Infrared modes: min/max/lock, C/F switch. Spot to distance ratio 1:1.

Two AAA batteries included.

Probe not included.

Thermocouple temperature range:

-58°F to 662°F/-50°C to 350°C.

Infrared

temperature range:

-58°F to 662°F/-50°C to 350°C.



9815A
Thermocouple Data Logger.

For use with any type K probe. It uses RS232 interface to a PC.

Includes software.

9 volt battery included.

Temperature:

-328°F/2498°F,

-200°C/1370°C.

Accuracy:

+/- 2°F; +/- 1°C.



9821 K-Type Thermocouple Thermometer.

Compact size. Oversized 1.1" readout. Hold function. C/F switch. Two AAA batteries included. Probe not included.

Temperature range:

-58°F to 662°F/-50°C to 350°C.

9821-PB

Thermocouple Thermometer with K-Type Probe.

Compact size. Oversized 1.1" readout. Hold function. C/F switch.

Includes 3.9" K-Type probe with quick response time.

Two AAA batteries included.

Temperature range:

-58°F to 662°F/-50°C to 350°C.



9828
Thermo Check HACCP Temperature Recording System.

With Type K Waterproof Recording Thermocouple. Type K food insertion probe. Protective rubber boot.

Thermo Check Software on CD ROM.

AC power adapter and rechargeable batteries (included).



9867FDA
Digital Folding Probe Thermometer.

1.5mm probe diameter complies with FDA recommendations.

Antimicrobial casing.

Recalibration system.

Two AAA batteries included.

NSF listed.

Temperature range:


-40°F/572°F and

-40°C/300°C.

Speed:

Stabilized reading in 5 seconds or less.

K-Type Probes for Thermocouple Thermometers

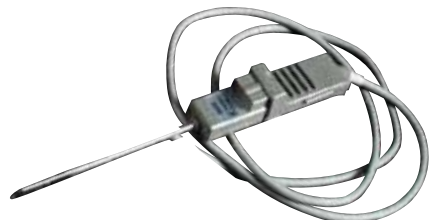

9405RP
1.575 mm tip diameter probe.
Replacement probe for 9405.



9806
Clip-on oven probe with 4' lead.




9810-2
Hamburger/filet probe; 3/16" tip with 5' lead.



9812
Angle surface probe with 5' lead.



9817
Step down penetration probe with
1.575mm tip diameter and 3' lead.

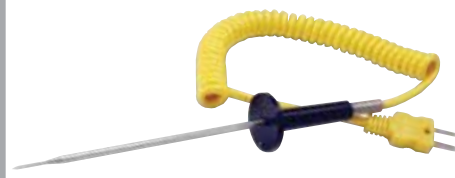

9818
Step down penetration probe with
1.50mm tip diameter and 3' lead.

Infrared Thermometers for Safe Non-Contact Temperature Measurement



9305
Dual Temp Combination, Infrared and Thermocouple Thermometer.
Min/max and hold features.
CR2032 lithium battery included.
Infrared temperature range:
-27°F/428°F or -33°C/220°C.
Probe range:
-67°F/630°F or -55°C/330°C.



9306N
Splash-Proof Dual Temp Infrared Thermometer with Fold Out Thermocouple Step Down Probe.
HACCP pass/fail light system. Min/max/hold features.
IP65 rated. Adjustable Emissivity. D:S=3.1.
Thermocouple range: -67°/626°F and -55°/330°C.
Infrared range: -67°/482°F and -55°/250°C. Thermocouple accuracy from 14° to 149°F (-10° to 65°C) +/-1°F (0.6°C). Infrared accuracy from 32°F to 149°F (0°C to 65°C). +/- 2°F (1°C). Resolution 0.5°F or 0.2°C. Auto shut off. Two AAA batteries included.



9523
Infrared Thermometer.
Scan and hold features. Emissivity fixed at 0.95 and resolution at 0.1°F/0.1°C.
Two AAA batteries and nylon case included.
Temperature range:
-49°F to 752°F/-45°C to 400°C.
Distance: Spot 6:1



9527
Infrared Thermometer.
Min/max and lock modes. Auto off after 15 seconds. Emissivity range: 0.95 default -adjustable 0.005 to 1 (step 0.1). Low battery indicator. Protective rubber boot and lanyard included. One CR2032 battery included.
Temperature range:
-67°F to 428°F/-55°C to 220°C.
Resolution: 0.1°F/0.1°C.
Accuracy: +1.1°F (+0.6°C).
Response time: 1 second.



9532
K-Type Thermocouple Plus Infrared Thermometer.
Compact size. Oversized split LCD. Infrared modes: min/max/lock, C/F switch. Spot to distance ratio 1:1. Two AAA batteries included. Probe not included.
Thermocouple temperature range:
-58°F to 662°F/-50°C to 350°C.
Infrared temperature range:
-58°F to 662°F/-50°C to 350°C.

Pocket Digital Thermometers



3516

TruTemp® Digital Instant Read Thermometer.

0.3" LCD readout.
On/Off button.
Pocket case with clip.
One LR44 battery included.
NSF listed.
Temperature range:
-40°F/302°F.



3519

TruTemp® Waterproof Digital Thermometer.

Compact pen-style. Large LCD readout.
On/off and hold buttons. Auto shut off feature. One LR44 battery included.
NSF listed.
Temperature range:
-40°F/450°F and -40°C/230°C.



9836

Adjustable Head

Digital Thermometer. Large 1" readout. Durable stainless steel 5" stem with step down tip. Storage sleeve. Auto shut-off feature. One LR44 battery included.

Temperature range:
-40°F/450°F and -40°C/230°C.



9840PRN

Digital Thermometer.

Reduces the risk of cross-contamination. Helps support allergy safety. Stainless steel stepdown probe. Protective sleeve included. Auto-off feature. NSF listed.
Temperature range:
-40°F/302°F and -40°C/150°C.



9840RB

Digital Thermometer.

With protective rubber boot to withstand drops. Stainless steel stepdown probe. Protective sleeve included. Auto-off feature. NSF listed.
Temperature range:
-40°F/302°F and -40°C/150°C.



9841RB

High Temp Digital Thermometer.


With protective rubber boot to withstand drops. Stainless steel stepdown probe. Protective sleeve included. Auto-off feature. NSF listed.
Temperature range:
-40°F/500°F and -40°C/260°C.



9842FDA

Waterproof Digital Thermometer.

Auto-off feature, recalibratable. C/F switch. Antimicrobial sleeve and casing. One LR44 battery included. NSF listed.
Temperature range:
-40°F/450°F and -40°C/230°C.



9848EFDA

Waterproof Digital Thermometer.

Min/max and hold features. Recalibratable. Antimicrobial sleeve and casing. Blue backlit LCD. One CR2032 battery included. NSF listed.
Temperature range:
-40°F/450°F and -40°C/230°C.



9877FDA

Compact Waterproof Digital Thermometer.

Waterproof and dishwasher safe. 1.5mm FDA recommended step down probe. Response time less than 6 seconds with 1 second updates. Min/max/hold features. Safe-T-Guard™ antimicrobial case and sleeve. Auto-off to conserve battery. Operates on one CR1225 battery included. NSF listed.
Temperature range:
-40°F to 450°F and -40°C to 232°C.

Pocket Digital Thermometers (cont.)



**9878E
High Precision
Digital Thermometer.**
1.5mm FDA recommended step down probe. Min/max and hold features. Recalibratable. Safe-T-Guard™ antimicrobial case and sleeve. Auto-off and disable auto-off functions. Amber backlit LCD. Operates on one CR2032 battery included. NSF listed.
Temperature range:
-40°F/500°F and -40°C/260°C.



**9878EPR
Allergen Waterproof
Digital Pocket Thermometer.**
Reduces the risk of cross-contamination. Helps support allergy safety. 1.5mm FDA recommended step down probe. Min/max and hold features. Recalibratable. Safe-T-Guard™ antimicrobial case and sleeve. Auto-off and disable auto-off functions. Amber backlit LCD. Operates on one CR2032 battery included. NSF listed.
Temperature range:
-40°F/500°F and -40°C/260°C.



Roast/Meat Thermometers



**3504
TruTemp® Meat Dial
Thermometer.**
Easy-to-read 2" dial. Roasting scale with USDA guidelines. Adjustable temperature indicator. Stainless steel 4 1/2" stem. NSF listed.
Temperature range:
120°F to 210°F.



**5937N
Taylor® Multi-Purpose
Thermometer.**
Armored sabre-tipped tube. Easy-to-read face. Dishwasher safe.
Temperature range:
105°F to 185°F.



**5939N
Taylor® Meat
Thermometer.**
Easy-to-read 2 3/4" dial. 5 1/2" stem. Prep scale for various meats. NSF listed.
Temperature range:
120°F to 212°F.



**5947
Oven/Meat Dial
Combination Thermometer.**
Monitor cooking and oven temperature at the same time. NSF listed.
Oven temperature range:
100°F to 500°F.
Meat temperature range:
120°F to 190°F.



**5984J
Instant Read Oven
Thermometer.**
1 3/4" dial with 5" stem. NSF listed.
Temperature range:
0°F to 220°F



**5990N
Taylor® Pro Meat
Thermometer.**
Easy-to-read 3" dial with prep scale for various meats. Spun stainless steel dial. NSF listed.
Temperature range:
120°F to 212°F.



**6081J8
Thermometer.**
2" dial, 8" stainless steel stem for instant reading when inserting in meat/poultry. Shock proof. Recalibration hex nut. Packed in individual carton. NSF listed.
Temperature range:
100°F to 220°F.



**61054J
Thermometer.**
2" easy-to-read dial. 4" stainless steel stem. Glass crystal. Packed in individual carton.
Temperature range:
0°F to 220°F.

Cooking Thermometers



1470N

Taylor® Digital Thermometer and Timer.

Stainless steel probe with 4' cord. Temperature alarm signals when food is done. On/off switch to preserve battery life. Folds down for compact storage. Magnet on back for mounting to stove. Operates on two AAA batteries (included).

Temperature range: 32°F/392°F and 0°C/200°C.

1470NRP

Replacement Probe.

For model 1470N.



3518N

TruTemp® Digital Cooking Thermometer.

Stainless steel probe with 4' silicone cord. C/F switch. Stand or use with magnet on back for mounting to stove. Operates on one AAA battery (included).

Temperature range: 32°F/392°F and 0°C/200°C.

1470NRP

Replacement Probe.

For model 3518N.

Floating Thermometer



5933

Floating Thermometer.

Unique function-floats for use in any soups, sauces and stews. Floats to the surface even during stirring.

Sealed housing, temperature and food safe stainless steel construction.

Zones listed for poach, simmer, scald, or boil.

NSF listed.

Temperature range:


120°F/220°F.



Candy & Deep-Fry Thermometers



519
Digital
Candy/Deep Fry Thermometer.
 Preset candy and deep fry temperatures. Unit beeps and flashes when desired preset temperature is approaching and then reached. Lithium battery included.
Temperature range:
 -40°F/450°F and -40°C/230°C.




3505
TruTemp®
Candy/Deep Fry Thermometer.
 Easy-to-read 2" dial. Adjustable pan clip and temperature indicator. 6" stem.
 NSF listed.
Temperature range:
 100°F to 380°F.



3522
TruTemp®
Deep Fry Thermometer.
 Easy-to-read 2 1/2" dial. Durable extra long 12" stainless steel stem with adjustable pan clip. Movable temperature indicator for easy reference. Instant read.
 NSF listed.
Temperature range:
 50°F/550°F and 50°C/285°C.



5911N
Taylor® Candy/Deep Fry Thermometer.
 Large easy-to-read 2 3/4" dial. Adjustable pan clip.
 Durable 6" stainless steel stem.
 NSF listed.
Temperature range:
 100°F/400°F and 50°C/200°C.



5978N
Taylor® Candy/Deep Fry Thermometer.
 Glass tube with adjustable pan clip. Convenient cooking chart is printed on the protective storage sleeve.
 8" long.
Temperature range:
 100°F/400°F and 50°C/200°C.



5983N
Taylor® Candy/Deep Fry Thermometer.
 Large, easy-to-read temperature zones. Insulated handle with built-in pan clip.
 Durable stainless steel.
 12" long.
Temperature range:
 100°F/400°F and 50°C/200°C.



5992N
Taylor®
Pro Candy/Deep Fry Thermometer.
 Professional quality and accuracy. Deluxe, easy-to-read 3" spun stainless steel dial. Adjustable pan clip.
 6" stainless steel stem. NSF listed.
Temperature range:
 100°F/400°F.



6084J8
Professional Candy/Deep Fry Thermometer.
 2" dial with 8" stem.
Temperature range: 50°F/550°F.

6084J12
Professional Candy/Deep Fry Thermometer.
 2" dial with 12" stem.
Temperature range: 50°F/550°F.



9839-15
Adjustable Head Digital Candy/Deep Fry Thermometer.
 Multi-position pivoting head. Large 1" readout.
 Adjustable pan clip.
 Durable stainless steel 9" stem.
 Auto shut-off feature.
 LR44 battery included.
Temperature range:
 -40°F/450°F and -40°C/230°C.

Oven/Grill Thermometers



8140MG

Grill/Smoker Thermometer.

Smoke & BBQ range indicators. Dial features a luminescent background making it easy to read in the dark. 2 3/4" oversized dial, heavy duty stainless steel construction with 1.88" stem. Base of thermometer can be mounted into smoker wall for accurate readings.

Temperature range:

100°F to 500°F.



3506


TruTemp®

Oven Dial Thermometer.

Easy-to-read 2 1/2" dial. Durable stainless steel. Hangs or stands. NSF listed.

Temperature range:

100°F/600°F and 50°C/300°C.



5921N

Taylor®

Pro Oven Guide Thermometer.

Easy-to-read zone guide references. Durable stainless steel. Hangs or stands.

Temperature range:

100°F/600°F



5932

Taylor®

Oven Dial Thermometer.

Easy-to-read 3 1/4" dial. Durable stainless steel. Hangs or stands. NSF listed.

Temperature range:

100°F/600°F and 50°C/300°C



5980N

Professional

Hot Holding Thermometer.

With HACCP guidelines. Blister card. NSF listed.

Temperature range:

100°F/180°F and 38°C/82°C.



5984J

Instant Read

Oven Thermometer.

1 3/4" dial with 5" stem. NSF listed.

Temperature range:

0°F/220°F.



5995N

Taylor® Pro

Oven Thermometer.

Large, easy-to-read 3" dial. Deluxe two-way hanger/stand for more secure placement on oven racks. NSF listed.

Temperature range:

200°F/500°F.



6021

Grill Surface Thermometer.

Easy-to-read 2" dial. Detachable wire for ease in handling. Enclosed design protects coil from surface dirt & grease. Durable stainless steel construction. NSF listed.

Temperature range:

100°F/700°F and 50°C/350°C.



6246J

CharBroiler Thermometer.

Hermetically sealed. Holder for use on the grill.

Temperature range:

200°F/1000°F.

Refrigerator/Freezer Thermometers



1442 Critical Care Thermometer.

For monitoring temperature critical materials. Programmable high and low limit alarms. 96 hour memory of high and low temperatures. Records a history of alarm breaches including time and duration. Dual 6' glycol-tolerant probes. Password protected.

2 AAA batteries included.

Temperature range:

-40°F/221°F and -40°C/105°C.



1443 Digital Refrigerator/Freezer Thermometer.

Compact size hangs, stands or attaches with magnet.

Min/max feature.

Bold 0.8" LCD readout.

Includes one CR2025 battery.

Temperature range:

-4°F/140°F and -20°C/60°C.



1446 Wireless Refrigeration Thermometer.

With remote sensors.

Two remote sensors transmit reading to display unit.

Visual and audible alarms

based on user set min and max temperatures. Transmission range up to 65 feet from display unit.

Audible and visual alarm with 15 minute delay. Two AAA batteries for base unit and four AA batteries for sensors not included.

Temperature range:

-22°F/104°F and -30°C/40°C.



3503 Tru Temp® Refrigerator/Freezer Thermometer.

Easy-to-read face.

Clips, hangs or attaches with suction cups. Safe temperature zone indicators.

NSF listed.

Temperature range:

-20°F/60°F and -30°C/30°C.



3507 Tru Temp® Refrigerator/Freezer Thermometer.

Large 2 1/4" dial. Durable stainless steel. Hangs or stands. Safe temperature zone indicators. NSF listed.

Temperature range:

-20°F/80°F and -30°C/30°C.



3509 TruTemp® Refrigerator/Freezer Thermometer.

Compact size clips to rack or attaches with suction cup.

Safe temperature zone indicators. Blister carded.

NSF listed.

Temperature range:

-20°F/80°F and -30°C/30°C.



5924 Taylor® Refrigerator/Freezer Thermometer.

Extra large, colorful 3 1/4" dial.

Durable stainless steel. Hangs or stands. Safe temperature zone indicators.

NSF listed.

Temperature range:

-20°F/80°F and -30°C/30°C.



5925N Taylor® Refrigerator/Freezer Thermometer.

Magnified, easy-to-read face. Shatterproof plastic lens protects glass tube filled with non-toxic liquid. Hangs or stands. Safe temperature zone indicators. NSF listed.

Temperature range:

-20°F/80°F and -30°C/30°C.

Refrigerator/Freezer Thermometers (cont.)



5925-44
International Series
Refrigerator/Freezer
Thermometer.

Same as 5925N with Celsius dominant scale.

Trilingual packaging.

NSF listed.

Temperature range:

-30°C/20°C and -20°F/60°F.



5926
Economy Hanging
Refrigerator/Freezer
Thermometer.

Bulk pack of 50 per box.

Temperature range:

-20°F/80°F and -30°C/30°C.



5927
Glycol Refrigerator/Freezer
Thermometer.

Polypropylene Glycol simulates food product temperatures for a more accurate reading.

Not affected by ambient air changes due to door openings or cold and warm spots.


Reduces energy cost by mimicking food temperatures.

Hangs/stands/sits.

NSF listed.

Temperature range:

-20°F/60°F and -30°C/30°C.



5977N
Taylor® Refrigerator/
Freezer Thermometer.

Easy-to-read face.

Safe temperature zone indicators.

Temperature range:

-20°F/60°F.



5981N
Professional Cold Holding
Thermometer.

With HACCP guidelines.

NSF listed.

Temperature range:

-30°F/70°F and -34°C/20°C.



5982N
Taylor® Milk/Beverage
Thermometer.

Includes adhesive and magnetic backing.

Temperature range:

-40°F/120°F and -40°C/50°C.



5994
Taylor® Refrigeration
Thermometer.

Professional quality and accuracy.

Easy-to-read 3" dial with safe temperature zone guide.

Durable stainless steel.

Includes adhesive backing.

NSF listed.

Temperature range:

-30°F/70°F and -34°C/20°C.



5996N
Taylor® Pro Refrigerator/
Freezer Thermometer.

Professional quality and accuracy.

Easy-to-read 3" dial with safe temperature zone guide.

Durable stainless steel.

Hangs or stands.

NSF listed.

Temperature range:

-30°F/70°F.

HACCP Food Safety Items



8018N
HACCP Pocket Test Thermometer.
5" stem and 1 3/4" dial.
Standard grade with 1 point calibration and antimicrobial sleeve.
NSF listed.
Temperature range:
0°F/220°F and 0°C/100°C.



3621N
Thermometer.
Superior grade with 3 point calibration and antimicrobial case.
NSF listed.
Temperature range:
0°F/220°F.



5980N
Professional Hot Holding Thermometer.
HACCP guidelines.
NSF listed.
Temperature range:
100°F/180°F and 38°C/82°C.



5981N
Professional Cold Holding Thermometer.
HACCP guidelines.
NSF listed.
Temperature range:
-30°F/70°F and -30°C/20°C.

REDUCE RISK OF CROSS-CONTAMINATION

6092N-FSA
1" Dial Instant Read Reduce Cross-Contamination Thermometer 5-Pack.
(5) 1" dial with 5" stem.
Stainless steel construction with shatterproof lens. Pocket sleeve with patented built-in calibration feature.
NSF listed.

Temperature range:
0°F/220°F and -10°C/100°C.
Color Coded: Blue-Fish; Brown-Cooked Meat; Purple-Allergy; Red-Raw Meat; Yellow-Poultry



Color Coded: BLUE - FISH



6092NBL
1" Dial Instant Read Reduce Cross-Contamination Thermometer.
1" dial with 5" stem. Stainless steel construction with shatterproof lens. Pocket sleeve with patented built-in calibration feature. NSF listed.
Temperature range:
0°F/220°F and -10°C/100°C.

Color Coded: BROWN - COOKED MEAT



6092NBR
1" Dial Instant Read Reduce Cross-Contamination Thermometer.
1" dial with 5" stem. Stainless steel construction with shatterproof lens. Pocket sleeve with patented built-in calibration feature. NSF listed.
Temperature range:
0°F/220°F and -10°C/100°C.

Color Coded: PURPLE - ALLERGY



6092NPR
1" Dial Instant Read Reduce Cross-Contamination Thermometer.
1" dial with 5" stem. Stainless steel construction with shatterproof lens. Pocket sleeve with patented built-in calibration feature. NSF listed.
Temperature range:
0°F/220°F and -10°C/100°C.

Color Coded: RED - RAW MEAT



6092NRD
1" Dial Instant Read Reduce Cross-Contamination Thermometer.
1" dial with 5" stem. Stainless steel construction with shatterproof lens. Pocket sleeve with patented built-in calibration feature. NSF listed.
Temperature range:
0°F/220°F and -10°C/100°C.

Color Coded: YELLOW - POULTRY



6092NYL
1" Dial Instant Read Reduce Cross-Contamination Thermometer.
1" dial with 5" stem. Stainless steel construction with shatterproof lens. Pocket sleeve with patented built-in calibration feature. NSF listed.
Temperature range:
0°F/220°F and -10°C/100°C.



TempRite® Test Strips

TempRite® Dishwasher Temperature Test Strips. Waterproof. One time use. 1 pack of 25 strips.
Accuracy: $\pm 2^{\circ}\text{F}$.
8766J $160^{\circ}\text{F}/71^{\circ}\text{C}$.
8767J $180^{\circ}\text{F}/82^{\circ}\text{C}$.



TempRite® Test Labels

TempRite® Adhesive Dishwasher Temperature Test Labels. Waterproof. One time use. 1 pack of 24 labels.
Accuracy: $\pm 2^{\circ}\text{F}$.
8750 $180^{\circ}\text{F}/82^{\circ}\text{C}$.
8751 $160^{\circ}\text{F}/71^{\circ}\text{C}$.
8752 $170^{\circ}\text{F}/76^{\circ}\text{C}$.
8769 $160^{\circ}\text{F}/71^{\circ}\text{C}$; $170^{\circ}\text{F}/77^{\circ}\text{C}$ and $180^{\circ}\text{F}/82^{\circ}\text{C}$.



9306N

Splash-Proof Dual Temp Infrared Thermometer with Fold Out Thermocouple Step Down Probe. HACCP pass/fail light system. Min/max/hold features. IP65 rated. Adjustable Emissivity. D:S=3.1. **Thermocouple range:** $-67^{\circ}/626^{\circ}\text{F}$ and $-55^{\circ}/330^{\circ}\text{C}$. **Infrared range:** $-67^{\circ}/482^{\circ}\text{F}$ and $-55^{\circ}/250^{\circ}\text{C}$. Thermocouple accuracy from 14° to 149°F (-10° to 65°C) $\pm 1^{\circ}\text{F}$ (0.6°C). Infrared accuracy from 32°F to 149°F (0°C to 65°C). $\pm 2^{\circ}\text{F}$ (1°C). Resolution 0.5°F or 0.2°C . Auto shut off. Two AAA batteries included.



9405

High Accuracy Waterproof K-Type Thermocouple Thermometer.

With 2-second response probe on a 4 ft. cord. $\pm 1^{\circ}$ over HACCP range, recalibratable by front panel switches, auto-off feature. 9 volt battery included.
Temperature range:
 $-40^{\circ}\text{F}/500^{\circ}\text{F}$ or $-40^{\circ}\text{C}/260^{\circ}\text{C}$.



9523

Infrared Thermometer.

Scan and hold features. Emissivity fixed at 0.95 and resolution at $0.1^{\circ}\text{F}/0.1^{\circ}\text{C}$. Two AAA batteries and nylon case included.
Temperature range:
 -49°F to $752^{\circ}\text{F}/-45^{\circ}\text{C}$ to 400°C .
Distance: Spot 6:1



9527

Infrared Thermometer.

Min/max and lock modes. Auto off after 15 seconds. Emissivity range: 0.95 default-adjustable 0.005 to 1 (step 0.1). Low battery indicator. Protective rubber boot and lanyard included. One CR2032 battery included.
Temperature range:
 -67°F to $428^{\circ}\text{F}/-55^{\circ}\text{C}$ to 220°C .
Resolution: $0.1^{\circ}\text{F}/^{\circ}\text{C}$.
Accuracy: $\pm 1.1^{\circ}\text{F}$ ($\pm 0.6^{\circ}\text{C}$).
Response time: 1 second.



9815A

Thermocouple Data Logger.

For use with any type K probe. It uses RS232 interface to a PC. Includes software. 9 volt battery included.
Temperature:
 $-328^{\circ}\text{F}/2498^{\circ}\text{F}$, $-200^{\circ}\text{C}/1370^{\circ}\text{C}$.
Accuracy:
 $\pm 2^{\circ}\text{F}$; $\pm 1^{\circ}\text{C}$.

9821 K-Type Thermocouple Thermometer.

Compact size. Oversized 1.1" readout. Hold function. C/F switch. Two AAA batteries included. Probe not included.

Temperature range:
 -58°F to $662^{\circ}\text{F}/-50^{\circ}\text{C}$ to 350°C .

9821-PB

Thermometer with K-Type Probe.

Compact size. Oversized 1.1" readout. Hold function. C/F switch. Includes 3.9" K-Type probe with quick response time. Two AAA batteries included.

Temperature range:
 -58°F to $662^{\circ}\text{F}/-50^{\circ}\text{C}$ to 350°C .



9829

Temp-Taker™ HACCP Food Safety Solution is an automated temperature recording data logger with pre-programmed HACCP Menu Plan and HACCP Control Points. Temp-Taker™ consists of: Temp-Taker™ Type K Recording Thermocouple; Type K food insertion probe with 1.50mm diameter tip; Temp-Taker™ Software CD; USB Cable and AC Adapter; Safe-T-Guard™ sanitizing tube. 3AA batteries included.

HACCP Food Safety Items (cont.)



9840PRN

Digital Thermometer.

Reduces the risk of cross-contamination. Helps support allergy safety. Stainless steel stepdown probe. Protective sleeve included. Auto-off feature. NSF listed.

Temperature range:

-40°F/302°F and -40°C/150°C.



9842FDA

Waterproof Digital Thermometer.

Auto-off feature, recalibratable. C/F switch. Antimicrobial sleeve and casing. One LR44 battery included. NSF listed.

Temperature range:

-40°F/450°F and -40°C/230°C.



9848EFDA

Waterproof Digital Thermometer.

Min/max and hold features. Recalibratable. Antimicrobial sleeve and casing. Blue backlit LCD. One CR2032 battery included. NSF listed.

Temperature range:

-40°F/450°F and -40°C/230°C.



9867FDA

Digital Folding Probe Thermometer.

1.5mm probe diameter complies with FDA recommendations. Antimicrobial casing. Recalibration system. Two AAA batteries included. NSF listed.

Temperature range:

-40°F/572°F and -40°C/300°C.



9877FDA

Compact Waterproof Digital Thermometer.

Waterproof and dishwasher safe. 1.5mm FDA recommended step down probe. Response time less than 6 seconds with 1 second updates. Min/max/hold features. Safe-T-Guard™ antimicrobial case and sleeve. Auto-off to conserve battery. Operates on one CR1225 battery included. NSF listed.

Temperature range: -40°F to 450°F and -40°C to 232°C.



9878E

High Precision Digital Thermometer.

1.5mm FDA recommended step down probe. Min/max and hold features. Recalibratable. Safe-T-Guard™ antimicrobial case and sleeve. Auto-off and disable auto-off functions. Amber backlit LCD. Operates on one CR2032 battery included. NSF listed.

Temperature range:

-40°F/500°F and -40°C/260°C.



9878EPR

Allergen Waterproof Digital Pocket Thermometer.

Reduces the risk of cross-contamination. Helps support allergy safety. 1.5mm FDA recommended step down probe. Min/max and hold features. Recalibratable. Safe-T-Guard™ antimicrobial case and sleeve. Auto-off and disable auto-off functions. Amber backlit LCD. Operates on one CR2032 battery included. NSF listed.

Temperature range:

-40°F/500°F and -40°C/260°C.



9999N

HACCP Probe Wipes.

70% Isopropyl Alcohol. 10 boxes per case. 100 single use wipes per box.



9999T

Thermometer Probe Wipes.

70% Isopropyl Alcohol. 70 cleansing wipes. 10 tubs per case.

Special Use Thermometers / Strips

5416J

Thermometer.

F&C cup case,
ring top, brass case.
Permacolor filled.
Temperature range:
-40°F/130°F and -40°C/55°C.



5948N

Tobacco

Thermometer.

Temperature range:
10°F/200°F and
-10°C/95°C.



5976N

Soil

Thermometer.

Temperature range:
20°F/180°F and 0°C/80°C.



HOT BEVERAGE THERMOMETER



5985N

Hot Beverage Thermometer.

1" dial with 5" stem.
Includes pan clip and sleeve
with built-in calibration wrench.
NSF listed.
Temperature range:
0°F/220°F.

HOT BEVERAGE THERMOMETER



5997E

Cappuccino Frothing Thermometer.

Easy-to-read zoned dial for
optimum frothing temperatures.
Sealed dial design
to prevent fogging.
Temperature range:
120°F/180°F and 50°C/80°C.

HOT BEVERAGE THERMOMETER



8215N

1 3/4" Bi-Thermometer.

9" stem. Recalibratable.
Vessel clip included.
Blister carded. NSF listed.
Temperature range:
0°F/220°F and -10°C/100°C.

DISHWASHER TEST THERMOMETERS & SENSORS



8750

Temperature Test Labels.

TempRite®
adhesive dishwasher safe and waterproof.
One time use. 1 pack of 24 labels.
Temperature range: 180°F/82°C.
Accuracy: +/- 2°F.



8751

TempRite® Adhesive Dishwasher Temperature Test Labels. Waterproof.
One time use. 1 pack of 24 labels.
Temperature range: 160°F/71°C.
Accuracy: +/- 2°F.

8752

TempRite® Adhesive Dishwasher Temperature Test Labels. Waterproof.
One time use. 1 pack of 24 labels.
Temperature range: 170°F/76°C.
Accuracy: +/- 2°F.

DISHWASHER TEST THERMOMETERS & SENSORS



8766J

TempRite® Dishwasher Temperature Test Strips. 1 pack of 25 strips.
Temperature range: 160°F/71°C.

8767J

TempRite® Dishwasher Temperature Test Strips. 1 pack of 25 strips.
Temperature range: 180°F/82°C.

DISHWASHER TEST THERMOMETERS & SENSORS



8769

TempRite® 3 in 1 Adhesive Dishwasher Temperature Test Labels.
1 pack of 24 labels.
Temperature ranges: 160°F/71°,
170°F/77°C, 180°F/82°C.

DISHWASHER TEST THERMOMETERS & SENSORS



21462-1J

Dishwasher Test Thermometer.

Mercury filled. Tube sealed in open face
armor case made of high-temperature
MINLON® plastic. Maximum registering.
Individually packaged.
Temperature range: 0°F/220°F.

Panel Mount Digital Thermometer



9940N
Panel Mount Digital Thermometer.
 Flush and flange mounting options.
 Waterproof housing and probe.
 10' cable for both air and liquid immersion.
 Operates on one AAA battery (included).
Temperature range:
 -40°F/300°F and
 -40°C/150°C.




TruTemp® Thermometers



3503
TruTemp® Refrigerator/Freezer Thermometer.
 Easy-to-read face.
 Clips, hangs or attaches with suction cups.
 Safe temperature zone indicators.
 NSF listed.
Temperature range:
 -20°F/60°F and -30°C/30°C.



3504
TruTemp® Meat Dial Thermometer.
 Easy-to-read 2" dial.
 Roasting scale with USDA guidelines. Adjustable temperature indicator.
 Stainless steel 4 1/2" stem.
 NSF listed.
Temperature range:
 120°F/210°F.



3505
TruTemp® Candy/Deep Fry Thermometer.
 Easy-to-read 2" dial.
 Adjustable pan clip and temperature indicator.
 6" stem.
 NSF listed.
Temperature range:
 100°F/380°F.



3506
TruTemp® Oven Dial Thermometer.
 Easy-to-read 2 1/2" dial.
 Durable stainless steel.
 Hangs or stands.
 NSF listed.
Temperature range:
 100°F/600°F and 50°C/300°C.

TruTemp® Thermometers (cont.)



3507

TruTemp® Refrigerator/Freezer Thermometer.

Large 2 1/4" dial. Durable stainless steel. Hangs or stands. Safe temperature zone indicators. NSF listed.

Temperature range:

-20°F/80°F and -30°C/30°C.



3509

TruTemp® Refrigerator/Freezer Thermometer.

Compact size clips to rack or attaches with suction cup. Safe temperature zone indicators. Blister carded. NSF listed.

Temperature range:

-20°F/80°F and -30°C/30°C.



3512

Instant Read Thermometer.

1" dial with magnified lens. Pocket case with clip. NSF listed.

Temperature range:

0°F/220°F.



3515

Instant Read Thermometer.

Oversized 1 3/4" dial with magnified lens. Pocket case with clip. NSF listed.

Temperature range:

0°F/220°F.



3516

TruTemp® Digital Instant Read Thermometer.

0.3" LCD readout. On/Off button. Pocket case with clip. One LR44 battery included. NSF listed.

Temperature range:

-40°F/302°F.



3517

Instant Read Thermometer.

1" dial with magnified lens. Pocket case with clip. NSF listed.

Temperature range:

50°F/550°F.



3518N

TruTemp® Digital Cooking Thermometer.

Stainless steel probe with 4' silicone cord. C/F switch. Stand or use with magnet on back for mounting to stove. Operates on one AAA battery (included).

Temperature range:

32°F/392°F and 0°C/200°C.



3519

TruTemp® Waterproof Digital Thermometer.

Compact pen-style. Large LCD readout. On/off and hold buttons. Auto shut off feature. One LR44 battery included. NSF listed.

Temperature range:

-40°F/450°F and -40°C/230°C.



3522

TruTemp® Deep Fry Thermometer.

Easy-to-read 2 1/2" dial. Durable extra long 12" stainless steel stem with adjustable pan clip. Movable temperature indicator for easy reference. Instant read. NSF listed.

Temperature range:

50°F/550°F and 50°C/285°C.

Large Dial Thermometers and Clocks



166

Patio Clock.

Brushed silver metal bezel and silk screened graphics. Weather resistant construction and clock movement cover. 12" diameter. One AA battery required (not included).



497J

Humidiguide Dial Thermometer.

All metal construction. Large, easy-to-read face. Also includes a relative humidity scale. 12" diameter.

Temperature range:

-60°F/120°F and -50°C/50°C.



681

Extra Large Thermometer.

Bold, easy-to-read graphics with brushed silver metal bezel. Rustproof and weather resistant. 18" diameter.

Temperature range:

-60°F/120°F and -50°C/50°C.



6714

Indoor/Outdoor 13.25" Dial Thermometer.

ColorTrak design features bright and colorful numbers. Framed in a glossy white bezel. Shatterproof and weather resistant.

Temperature range:

-60°F/120°F and -50°C/50°C.

Window/Wall Thermometers



1105J

Dry Storage Thermometer.

Easy to read in poor lighting. 12" long. Packed in individual carton.

Temperature range:

0°F/120°F and -30°C/50°C.

2° divisions.



1106J

Cold/Dry Storage Thermometer.

Easy to read in poor lighting. 12" long. Packed in individual carton.

Temperature range:

-50°F/70°F and -40°C/20°C.

1° divisions.



5109

Jumbo Wall Thermometer.

Bright red reading tube with extra large, colorful numbers. Weather resistant and rustproof for quick, accurate temperature checks inside or outside.

Temperature range:

-40°F/120°F and -40°C/50°C.



5132N

Utility Wall Thermometer.

White aluminum back with plastic endcaps.

Temperature range:

-40°F/120°F and -40°C/50°C.



5135N

Wall Thermometer.

Large, easy-to-read face. Weather resistant aluminum construction.

Temperature range:

-60°F/120°F and -50°C/50°C.



5153

Window Thermometer.

White, molded plastic with aluminum bracket. Weather resistant.

Temperature range:

-40°F/120°F and -40°C/50°C.



5154

Wall Thermometer.

Easy-to-read numerals in bright red and blue. Weather resistant and rustproof.

Temperature range:

-40°F/120°F and -40°C/50°C.



5316N

Window Thermometer.

Large, easy-to-read numerals. Adjustable offset bracket for multi-directional viewing. Rustproof aluminum construction.

Temperature range:

-40°F/120°F and -40°C/50°C.

Window/Wall Thermometers (cont.)




5321N

3 1/2" Dial Stick-On Window Thermometer.

Read outside temperature from inside.
Easy to apply suction cup mount.
Weather resistant and rustproof.

Temperature range:

-40°F/120°F.

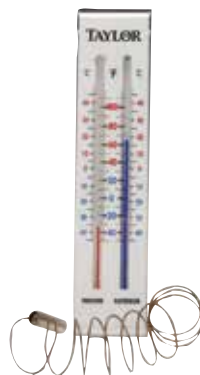

5327

Indoor/Outdoor Thermometer.

Read indoor and outdoor temperatures from inside.
Bold numerals in bright blue and red.

Temperature range:

-40°F/100°F and -40°C/40°C.



5329

Indoor/Outdoor Thermometer.

Dial to read indoor humidity.
Large, easy-to-read face.
Red indoor temperature, blue outdoor temperature.

Temperature range:

-40°F/120°F and -40°C/40°C.



5380N

1 3/4" Dial Stick-On Window Thermometer.

Indoor/outdoor multi-purpose thermometer easily mounts with double-faced adhesive.
Weather resistant and rustproof.

Temperature range:

-40°F/120°F and -40°C/50°C.



5504

Indoor Humidiguide and Thermometer.

Displays relative humidity and temperature.
4" square case hangs or stands.

Temperature range:

20°F/100°F.

Humidity range:

10% to 80%.



5630

Big Read/Black on White 6" Dial Thermometer.

Bold, easy-to-read numerals.
Bracket for window mounting.
Weatherproof and shatterproof materials.

Temperature range:

-60°F/120°F.



Max/Min Thermometers



1441E
Digital Max/Min Thermometer.
 20/120°F for 7 days at a time. Dual 3 meter probes for independent readings. 2 AAA batteries included.
Temperature range:
 -20°F/120°F and -29°C/50°C.



1442
Critical Care Thermometer.
 For monitoring temperature critical materials. Programmable high and low limit alarms. 96 hour memory of high and low temperatures. Records a history of alarm breaches included time and duration. Dual 6' glycol-tolerant prbes. Password protected. 2 AAA batteries included.
Temperature range:
 -40°F/221°F and -40°C/105°C.



1446
Wireless Refrigeration Thermometer.
 With remote sensors. Two remote sensors transmit reading to display unit. Visual and audible alarms based on user set min and max temperatures. Transmission range up to 65 feet from display unit. Audible and visual alarm with 15 minute delay. Two AAA batteries for base unit and four AA batteries for sensors not included.
Temperature range:
 -22°F/104°F and -30°C/40°C.



5458
Max/Min Thermometer.
 Magnet reset, registers high and low reading from last setting. Mercury filled.
Temperature range:
 -40°F/120°F.



5459
Max/Min Thermometer.
 Magnet reset, registers high and low reading from last setting. Mercury filled.
Temperature range:
 -40°C/50°C.

5460
Max/Min Thermometer.
 Push button reset and magnet reset, F°/C°. Permacolor™ filled.
Temperature range:
 -40°F/120°F and -40°C/50°C.



5566
Digital Hygrometer.
 Large, easy-to-read LCD. Wall mount or table top. Two AAA batteries not included. 300 days of continuous reading battery life.
Temperature range:
 -40°F/158°F and -40°C/70°C.
Humidity range: 10%-95%.

Pocket Case Thermometers



21412-1J
Pocket Thermometer in Plastic Case.
 Permacolor™ filled.
Temperature range:
 -50°F/120°F.



21420-1J
Pocket Thermometer in Plastic Case.
 Permacolor™ filled.
Temperature range:
 0°F/220°F.



21424-1J
Pocket Thermometer in Plastic Case.
 Permacolor™ filled.
Temperature range:
 -15°C/105°C.



21432-1J
Pocket Thermometer in Plastic Case.
 Permacolor™ filled.
Temperature range:
 -40°C/50°C.

Mechanical Timers



5830
Taylor® Pro
Stainless Steel
60 Minute Timer.
Rubberized knob and
base, 9 second ring.



5831N
Taylor®
60 Minute Timer.
Long ring.



5832
TruTimer™
60 Minute Timer.
Long ring.



Digital Timers



5806
Digital Timer.
Minute/second timing.
0.7" readout.
Count up countdown feature.
Clip/magnet/stand positioning.
One AAA battery included.
Timer range:
up to 99 minutes 59 seconds.



5816N
Taylor® Pro Chef's
Timer & Stopwatch.
Easy-to-read and operate.
3/8" LCD readout shows
minutes and seconds. 2ft
lanyard for easy handling.
Recall feature remembers
last display when alarm stops.
LR44 battery included.
Timer range:
up to 99 minutes 59 seconds.



5822
Memory Digital Timer.
Recalls last timing event
for easy programming.
0.8" LCD readout. Count
up and countdown feature.
Clip/magnet/stand positioning.
One AAA battery included.
Timer range:
up to 99 minutes 59 seconds.



5827-21
Digital Timer.
0.7" LCD readout.
Clip/magnet/stand
positioning.
One AAA battery
included.
Timer range:
up to 99 minutes 59 seconds.



5828
Dual Event
Digital Timer/Clock.
Times two events
simultaneously. 1.5" LCD
readout. Clock feature. Clip/
magnet/stand positioning.
One AAA battery included.
Timer range:
up to 23 hours
59 minutes 59 seconds.



5839
4 Event Digital Timer.
Times 4 events
simultaneously.
100 decibel alarms with
a distinctive ring for each
timer. Lights flash when timer
reaches zero. Water resistant.
Stand or wall mount.
Four AA batteries included.
Timer range: each timer
counts up to 9 hours 59
minutes 59 seconds.



5847-21
Digital Timer.
Memory and clock function.
Count up and down features.
Extra large LCD for easy
readout. Magnet or stand
positioning.
One AAA battery included.
Timer range:
up to 23 hours 59 minutes 59
seconds.

Digital Timers (cont.)



5862 Compact 4 Event Digital Timer.

Times up to 4 events simultaneously. Extra large LCD readout. 4 distinct beep tones. Count up and down features. 12/24 hour clock. Self standing/magnetic mounting feature. Two LR44 batteries included.

Timer range:
each timer times up to 99 hours 59 minutes 59 seconds.



5863 Water & Impact Resistant Timer.

Dust and water resistant-IP65 rated. Impact resistant up to 4 feet. 4 level adjustable volume. Counts up and counts down with memory recall. Backlight and clock features.

Timer range:
times up to 24 hours 59 minutes 59 seconds.



5896 Jumbo Readout Digital Timer.

Extra large 2.5"x1.6" display size. Counts up and counts down. Memory function to recall last time. Loud alarm. Magnet or stand positioning. LR44 battery included.

Timer range:
times up to 99 minutes 59 seconds.

Economical Digital Scales



**1020NFS
Taylor® Digital Scale.**
Measures either dry or liquid ingredients. Large 0.6" LCD readout. Stainless steel platform on black base. Add & weigh feature. Two AAA batteries included. NSF listed.

Capacity Dry and Liquid:
11 lb x 0.1 oz / 5 kg x 1g;
175 fl. oz x 0.1 fl. oz /
5000 ml x 1 ml.



**1250BK
Salter® Compact
Digital Scale.**
Ultra fine 0.005 oz / 0.01 g increments. Stainless steel platform. Weighing cover inverts for use as a tray. Two AAA batteries included.

Capacity: 16 oz / 0.005 oz /
500 g / 0.01 g.



**3817
Taylor® Compact
Digital Scale.**
Portable and easy to store. 0.9" LCD. Auto shut-off and tare functions. One CR2032 lithium battery included.

Capacity:
11 lb x 0.1 oz/5 kg x 1g.

3817: White
3817R: Red
3817-4: Assorted tray
pack red and white



**3801
Taylor® Digital Scale.**
Large weighing platform. Rubberized buttons. Silver tone finish. Tare function. Reads in pounds/ounces to 0.1 oz or kilograms to 1g. One CR2032 lithium battery included.

Capacity:
11 lb x 0.1 oz/5 kg x 1g.

Electronic Portion Control Scales with Stainless Steel Platform



Compact Digital Portion Control Scale.

5.38" x 5.38" stainless steel platform. Extra large 0.9" readout. Tare and hold function. Auto-off and disable auto-off feature when powered by batteries. Operates on two AAA batteries (not included) or AC adapter (included). NSF listed.

TE10FT

Capacity:

11 lb x 0.1 oz / 5 kg x 1 g.

TE32FT

Capacity:

2 lb x 0.01 oz / 1 kg x 0.5 g.



Digital Portion Control Scale.

7.15" x 7.15" stainless steel platform. Extra large 0.9" LCD readout. Calibration feature. Tare and hold function. Auto-off and disable auto-off feature when powered by batteries. Operates on two AAA batteries (not included) or AC adapter (included). NSF listed.

TE11FT

Capacity:

11 lb x 0.1 oz / 5 kg x 1 g.

TE22FT

Capacity:

22 lb x 0.1 oz / 10 kg x 1 g.



TE220S

Digital Portion Control Scale with Oversized Platform.

11.25" x 11.25" stainless steel removable, washable platform. Tare and hold function. Auto-off feature when powered by batteries. Operates on two AAA batteries (not included) or AC adapter (included). NSF listed.

Capacity:

22 lb x 0.1 oz / 10 kg x 1 g.



TE10R

Digital Portion Control Scale.

Removable 5" x 8" stainless steel platform. Tare and hold function. Auto-off and disable auto-off feature. Operates on rechargeable battery (included) or AC adapter (included). NSF listed.

Capacity:

10 lb x 0.1g / 5 kg x 1 g.



TE10T

10 lb Digital Portion Control Scale with Tower Readout.

Stainless steel platform. Large, easy-to-read 1.5" LCD readout with backlight. Tare and hold with auto-off features. Recalibratable. Operates on 4-AA batteries (not included) or AC adapter (included). Low battery indicator. NSF listed.

Capacity Dry and Liquid:

10 lb x 0.002 lb / 160 oz x 0.05 oz / 5000 g x 0.001 kg
160 fl. oz x 0.05 fl. oz / 5000 ml x 1 ml.



TE21P

21 oz Precision Measurement Digital Scale.

Tare and backlight features. Recalibratable. Includes count feature. Auto-off and disable auto-off when powered by batteries. Large 1" LCD readout. Removable stainless steel platform. Operates on 4-AA batteries (not included) or AC adapter (included). NSF listed.

Capacity: 21 oz x 0.01 oz / 0.0002 lb / 600 g x 0.1 g.



TE10CSW

Waterproof Digital Portion Control Scale.

IP67 rated. Tare function. Auto-off and disable auto-off features when powered by batteries. Low battery and overload indicators. Field recalibratable. Operates on one 9-volt battery (not included) or AC adapter (included). NSF listed.

Capacity Dry and Liquid:

10 lb x 0.002 lb / 10 lb x 0.05 oz
160 oz x 0.05 oz / 5000 g x 1 g
160 fl. oz x 0.05 fl. oz / 5000 ml x 1 ml



TE10SSW

Waterproof Digital Portion Control Scale.

IP67 rated. Plastic housing with stainless steel cover and platform. Large, easy-to-read 1" LCD readout with backlight. Tare and hold with high/low weigh features. Field recalibratable. Rechargeable battery and adapter included. NSF listed.

Capacity:

10 lb x 0.005 lb / 10 lb x 0.1 oz / 10 lb x 1/8 oz
160 oz x 0.05 oz / 160 oz x 1/8 oz / 5000 g x 1 g.

Electronic Portion Control Scales with Stainless Steel Platform (cont.)



TE30WD

30 lb Portion Control Digital Scale with Wireless Display.

Oversized 14" x 14" removable stainless steel platform. Wireless display head. Up to 3 channels for wireless transmission. Touchless tare feature. NSF listed.

Power Supply:

Base: 6-AA batteries (not included) and one 120V adapter (included).
Remote: 4-AA batteries (not included) and one 120V adapter (included).

Capacity:

0-10 lb x 0.05 oz /
0-5 kg x 0.002 kg (2 g)
10-30 lb x 0.1 oz /
5-15 kg x 0.005 kg (5 g)

Analog Portion Control Scales with Fixed Dial-Stainless Steel Chassis



TS32F

Features rugged stainless steel construction, angled dial design, protective shatterproof lens and removable platform. NSF listed.

Capacity:

32 oz x 1/4 oz / 900 g x 5 g.

Analog Portion Control Scales with Rotating Dial-Stainless Steel Chassis



TS5.

TS25KL.

TS32.

TS50.


Features rugged stainless steel construction, angled dial design, rotating dial, protective shatterproof lens and removable platform. NSF listed.

TS5 - Capacity: 5 lb x 1/2 oz / 2.2 kg x 20 g.

TS25KL - Capacity: 25 lb x 2 oz / 11 kg x 50 g.

TS32 - Capacity: 32 oz x 1/4 oz / 900 g x 5 g.

TS50 - Capacity: 50 lb x 4 oz

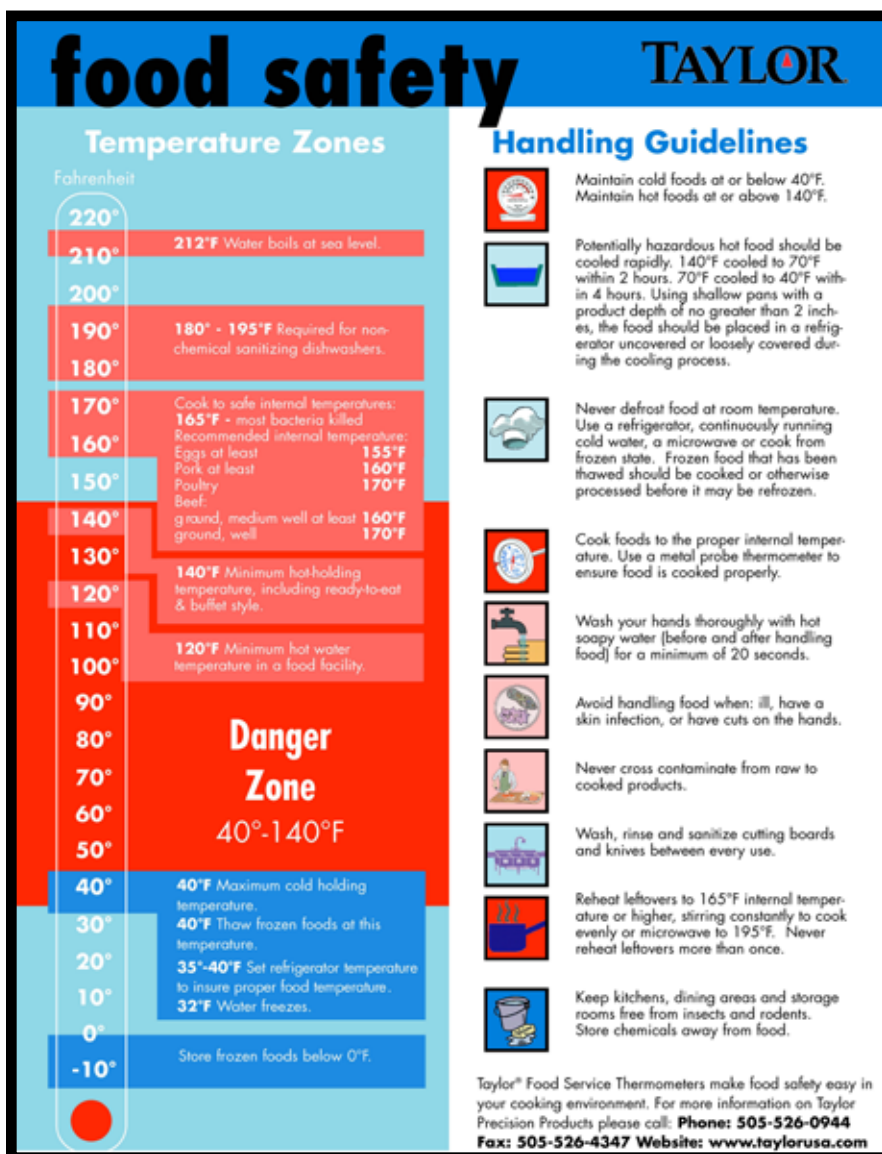

Analog Portion Control Scales with Dashpot-Stainless Steel Chassis

TS32D

Rugged stainless steel construction, angled dial design, protective shatterproof lens and removable platform. Internal dashpot and adjustable knob for tare feature. NSF listed.
Capacity:
 32 oz x 1/4 oz / 900 g x 5 g.



What's a Dashpot?



A dashpot is a mechanical device, a damper which resists motion of the spring. The dashpot acts as a shock absorber and slows down the indicator pointer. With a normal spring scale, it will take the pointer a few seconds to stop, with a dashpot, it is almost immediate. For high volume operations where speed is required, a dashpot scale will be a time saver.

Heavy Duty Mechanical Scales

Heavy Duty Mechanical Scales.

Stainless steel platform with internal stop mechanism. Features corrosion-resistant weighing mechanism, dual measurement, NSF food grade platform, and shatterproof lens with bold dial.

THD32

Capacity: 32 oz x 1/8 oz / 900 g x 2 g with 9" x 9" platform.

THD50

Capacity: 50 lbs x 2 oz / 22 kg x 100 g with 9" x 9" platform.



THD32D

Heavy Duty Mechanical Scale with Dashpot.

Stainless steel platform with internal stop mechanism and Dashpot. Features corrosion-resistant weighing mechanism, dual measurement, NSF food grade platform, and shatterproof lens with bold dial.

Capacity:

32 oz x 1/8 oz / 900 g x 2 g with 9" x 9" platform.



Compact Analog Portion Control Scales



TP16

Stainless Steel Scale.

Features antimicrobial housing with stainless steel NSF food grade platform. Internal stop mechanism and angled dial.
Capacity: 16 oz x 1/4 oz.



TP16FF

French Fry / Taco Holder Scale.

Features antimicrobial housing with NSF food grade platform. Internal stop mechanism and angled dial. Includes fixed french fry / taco holder.
Capacity: 16 oz x 1/4 oz.



TP32

Ice Cream Scale.

Features antimicrobial housing with NSF food grade platform. Internal stop mechanism and angled dial.
Capacity: 32 oz x 1/4 oz.

Receiving Scales



TE150
Stainless Steel Platform.
 6' coiled cord and 1" LCD readout.
 Runs on adapter (included) or
 Six AA batteries (not included).
Capacity:
 150 lb x 1/4 lb / 68 kg x 0.1 g.



TE400
Steel Tread Plate Platform.
 6' coiled cord and 1" LCD readout.
 Runs on adapter (included) or
 Six AA batteries (not included).
Capacity:
 400 lb x 1/4 lb / 181 kg x 0.2 g.



TR250
Heavy Duty Mechanical
Receiving Scale.
 Press lock feature.
Capacity:
 250 lb x 1 lb.

Hanging Scales



3070
Industrial
Hanging Scale.
 Dual lb/kg vertical
 scale with
 hanging hook.
Capacity:
 70 lb x 1 lb/32 kg x 500 g. Item
 #30704104.



3305
Industrial
Hanging
Scoop.
 Durable
 stainless steel scoop for
 use with hanging scales.
 Item #33054104N.



3328
Industrial
Hanging Scale.
 Dual lb/kg
 vertical scale
 with hanging hook.
Capacity:
 280 lb x 5 lb/128 kg x 2 kg.
 Item #33284104.



3470
Industrial
Hanging Scale.
 Dual lb/kg dial
 scale with
 hanging hook.
Capacity:
 70 lb x 0.5 lb/32 kg x 250 g.
 Item #34704104.

Accessories

5525NJ

Water Cistern for 5525.

51P432J1

Pan Clip for 1 3/4" and 2" BiTherm®

Replacement Parts for Model 9405/9400

9400BG

Replacement Battery Gasket for 9405

9405BC

Replacement Battery Cover for 9405/9400

9405RH

Replacement Handle for 9405

9405RP

Replacement Probe for 9405

Miscellaneous Parts and Supplies

97S35J

Wick for 5522, 5523 hygrometers

1470NRP

Replacement probe for model 1470N, 1478-21, 1471N

1471RP

Replacement probe for model 1471 (not for 1471N)

TEADPT1

120V adapter for models: TE150, TE400, TE21P

TEADPT2

220V adapter for models: TE150, TE400, TE21P

TEADPT3

120V adapter for models: TE10R

TEADPT7

Adaptor for EUROPE use only on models: TE10R

TEADPT10

120V adapter for model TE10T

TEADPT11

Adapter for TE10SSW

TEADPT12

Adapter for TE10FT, TE11FT, TE22FT, TE22OS, TE32FT

TEADPT13FT

220V adapter for models: TE10FT, TE11FT, TE22FT, TE32FT

TERBAT

Replacement battery for TE10R

Houdini Wine Accessories



W2807
Houdini Corkscrew.
 Pulls & ejects cork in seconds.

W2803 Shiny Black
W2805 Metallic Red
W2806 Silver
W2807 Velvet Black



W2207
Vertical Corkscrew.
 Stands up for quicker, easier cork pulls.

W2205 Metallic Red
W2206 Silver
W2207 Velvet Black



W4041
Wing Corkscrew.
 Clamps on bottle.
 Non-stick spiral.
 Will not crumble cork.



W5614
2-Step Waiter's Corkscrew.
 Non-stick spiral turns into cork faster.
 Foil cutter retracts automatically.



W5615
Magnetic Waiter's Corkscrew.
 Magnet allows for storage
 on bar refrigerator.
 Built-in foil cutter removes foil cap.



W6113
Foil Cutters.
 Removes foil quickly and neatly.
 Easy grip velvet finish.
 Black velvet finish.



Houdini Wine Accessories



W2634
Aerating Pourer.
Aerates red wine
as you pour.

W2634 Black
W2635 Metallic Red
W2636 Silver



W6115
Wine/Champagne Sealer.
Seals wine, champagne
and soda bottles air tight.
Easy grip velvet finish.
Fits any bottle size.
Black velvet finish.



W6119
Wine Bottle Stoppers.
Multi-colored wine stoppers, set of 2



W5577
Wine Preserver.
Vacuum pump with 2 stoppers.
Glossy black finish.



W5578
Vacuum Pump Stoppers.
Black finish.
Set of 4.



Hotel & Resort Products



916WHSVLKR
Salter Professional Large Dial Scale.
 Extra-large dial for easy reading.
 High 400 lb/180 kg capacity.
 Easy to clean, durable vinyl platform.
 Large, stable platform.



4832B
Analog Scale.
 Easy to read 5" speedometer dial
 300 lb capacity.
 Black textured mat platform.
 Silvertone bezel.



7029W
Digital Scale.
 Easy to read 3" display.
 330 lb capacity.
 Slim 1.5" profile.
 Textured finish platform.
 Silver accents.



7370
Digital Scale.
 Large 3.6" x 2" display.
 Accu-Glo™ blue backlight.
 Extra high 440 lb capacity.
 Antimicrobial platform inhibits the
 growth of bacterial odor and mold.



7403
Digital Scale.
 3" LCD display.
 Accu-Glo™ blue backlight.
 Extra high 440 lb capacity.
 Stainless steel platform.



7506
Digital Scale.
 Easy to read 1.2" digits.
 High 400 lb capacity.
 High-tempered glass platform.
 Chrome accents.



7562
Digital Scale.
 LCD readout.
 Reversed red digits.
 High 400 lb capacity.
 Black tempered glass platform.
 Brushed stainless steel accents.



7568
Digital Scale.
 Huge 3.75" x 2.5" display.
 Accu-Glo™ blue backlight.
 Extra high 440 lb capacity.
 Durable high-tempered glass platform.
 Platform size 13.5" x 12.25".



9857
Digital Scale.
 Super Brite™ red LED display.
 330 lb capacity.
 Ribbed textured mat.
 Non slip platform.



Index

MODEL NO.....	DESCRIPTION	PACK QUANTITY	PAGE
1020NFS	Economical Digital Scale	1	24
1105J	Wall Dry Storage Thermometer	1	20
1106J	Wall / Cold Dry Storage Thermometer	1	20
1250BK	Compact Digital Scale	6	24
1441E	Max / Min Thermometer	1	22
1442	Critical Care Refrigerator / Freezer Thermometer	1	12, 22
1443	Digital Thermometer	6	12
1446	Wireless Refrigerator / Freezer Thermometer	1	12, 22
1470N	Digital Cooking Thermometer	6	9
1470NRP	Replacement Probe for 1470N	1	9, 29
1471RP	Replacement Probe for 1471	1	29
166	Large Dial Wall Thermometer	5	20
21412-1J	Delrin® Plastic Pocket Thermometer	1	22
21420-1J	Delrin® Plastic Pocket Thermometer	1	22
21424-1J	Pocket Case Thermometer	1	22
21432-1J	Pocket Case Thermometer	1	22
21462-1J	Dishwasher Test Thermometer	1	17
3070	Industrial Hanging Scale	4	28
3305	Industrial Hanging Scoop	4	28
3328	Industrial Hanging Scale	4	28
3470	Industrial Hanging Scale	4	28
3503	Refrigerator / Freezer Thermometer	4	12, 18
3504	Meat Dial Thermometer	6	8, 18
3505	Candy / Deep Fry Thermometer	6	10, 18
3506	Oven Dial Thermometer	6	11, 18
3507	Refrigerator / Freezer Thermometer	6	12, 19
3509	Refrigerator / Freezer Thermometer	6	12, 19
3512	0/220° F Instant Read Thermometer	6	19
3515	0/220° F Instant Read Thermometer	6	19
3516	Digital Instant Read Thermometer	6	7, 19
3517	50/550° F Instant Read Thermometer	6	19
3518N	Digital Cooking Thermometer	3	9, 19
3519	Digital Cooking Thermometer	3	7, 19
3522	Deep Fry Thermometer	6	10, 19
3621N	Instant Read Thermometer with Sleeve	6	3, 14
3801	Digital Scale	1	24
3817	Compact Digital Scale	4	24
3817-4	Compact Digital Scale	6	24
3817R	Compact Digital Scale	4	24
4832B	Analog Bath Scale	2	32
497J	Humidiguide Dial Thermometer	5	20
51P432J1	Pan Clip	1	29
5109	Jumbo Wall Thermometer	6	20
5132N	Window / Wall Thermometer	6	20
5135N	Utility Thermometer	6	20
5153	Window Thermometer	6	20
5154	Indoor / Outdoor Wall Thermometer	6	20
519	Digital Candy / Deep Fry Thermometer	6	10
5316N	Indoor / Outdoor Wall Thermometer	6	20
5321N	Stick-on Window Thermometer	6	21
5327	Indoor / Outdoor Wall Thermometer	6	21
5329	Indoor / Outdoor Wall Thermometer	4	21
5380N	Stick-on Window Thermometer	12	21
5416J	Special Use Thermometer	4	17
5458	Max / Min Thermometer	4	22
5459	Max / Min Thermometer	4	22
5460	Max / Min Thermometer	4	22
5504	Indoor Humidiguide / Thermometer	6	21
5525NJ	Water Cistern for 5525	1	29
5566	Digital Thermometer / Hygrometer	6	22
5630	Big Read / Black on White Thermometer	6	21
5806	Digital Timer	6	23
5816N	Chef's Timer	6	23
5822	Digital Timer	6	23
5827-21	Digital Timer	6	23
5828	Two Event Digital Timer	6	23

Index

MODEL NO.....	DESCRIPTION	PACK QUANTITY	PAGE
5830.....	Stainless Steel Mechanical Timer.....	6.....	23
5831N.....	Mechanical Timer.....	6.....	23
5832.....	Mechanical Timer.....	6.....	23
5839.....	4 Event Timer.....	2.....	23
5847-21.....	Digital Timer.....	3.....	23
5862.....	4 Event Timer.....	6.....	24
5863.....	Waterproof Digital Timer.....	6.....	24
5872-9.....	Digital Timer.....	3.....	24
5896.....	Digital Timer.....	6.....	24
5911N.....	Candy / Deep Fry Thermometer.....	6.....	10
5921N.....	Oven / Grill Thermometer.....	6.....	11
5924.....	Refrigerator / Freezer Thermometer.....	6.....	12
5925-44.....	Refrigerator / Freezer Thermometer.....	6.....	13
5925N.....	Refrigerator / Freezer Thermometer.....	6.....	12
5926.....	Refrigerator / Freezer Thermometer.....	50.....	13
5927.....	Glycol Refrigerator / Freezer Thermometer.....	6.....	13
5932.....	Oven Thermometer.....	6.....	11
5933.....	Floating Thermometer.....	6.....	9
5937N.....	Roast / Meat Thermometer.....	6.....	8
5939N.....	Dial Meat Thermometer.....	6.....	8
5947.....	Dial Oven / Meat Thermometer.....	6.....	8
5948N.....	Tobacco Thermometer.....	12.....	17
5976N.....	Soil Thermometer.....	6.....	17
5977N.....	Refrigerator / Freezer Thermometer.....	6.....	13
5978N.....	Candy / Deep Fry Thermometer.....	6.....	10
5980N.....	Hot - Holding Thermometer.....	6.....	11, 14
5981N.....	Cold - Holding Thermometer.....	6.....	13, 14
5982N.....	Milk / Beverage Thermometer.....	12.....	13
5983N.....	Candy / Deep Fry Thermometer.....	6.....	10
5984J.....	Instant Read Oven Thermometer.....	6.....	8, 11
5985N.....	Hot Beverage Thermometer.....	4.....	17
5988N.....	1" Dial Standard Grade Thermometer.....	6.....	3
5989-44.....	Instant Read Thermometer with Holder.....	6.....	3
5989N.....	Instant Read Thermometer with Holder.....	6.....	3
5990N.....	Professional Meat Thermometer.....	6.....	8
5992N.....	Candy / Deep Fry Thermometer.....	6.....	10
5994.....	Refrigerator / Freezer Thermometer.....	6.....	13
5995N.....	Oven Thermometer.....	6.....	11
5996N.....	Refrigerator / Freezer Thermometer.....	6.....	13
5997E.....	Cappuccino Frothing Thermometer.....	4.....	17
6021.....	Grill Thermometer.....	6.....	11
6065N.....	1" Dial Standard Grade Thermometer.....	12.....	3
6071.....	1" Dial Superior Grade Thermometer.....	1.....	3
6072N.....	1" Dial Superior Grade Thermometer.....	12.....	3
6073J.....	1" Dial Superior Grade Thermometer.....	12.....	3
6075.....	1" Dial Superior Grade Thermometer.....	1.....	3
6076J.....	1" Dial Superior Grade Thermometer.....	12.....	3
6079J.....	1" Dial Superior Grade Thermometer.....	12.....	3
6081J8.....	Roast / Meat Thermometer.....	1.....	8
6084J12.....	Candy / Deep Fry Thermometer.....	1.....	10
6084J8.....	Candy / Deep Fry Thermometer.....	1.....	10
6091N.....	1" Dial Standard Grade Thermometer.....	12.....	3
6092N.....	1" Dial Standard Grade Thermometer.....	12.....	3
6092NBL.....	1" Dial Standard Grade Thermometer.....	6.....	14
6092NBR.....	1" Dial Standard Grade Thermometer.....	6.....	14
6092N-FSA.....	5Pk 1" Dial Standard Grade Thermometer.....	3.....	14
6092NPR.....	1" Dial Standard Grade Thermometer.....	6.....	14
6092NRD.....	1" Dial Standard Grade Thermometer.....	6.....	14
6092NYL.....	1" Dial Standard Grade Thermometer.....	6.....	14
6093N.....	1" Dial Standard Grade Thermometer.....	12.....	3
6094N.....	1" Dial Standard Grade Thermometer.....	12.....	3
6096N.....	1" Dial Standard Grade Thermometer.....	12.....	3
6099N.....	1" Dial Standard Grade Thermometer.....	12.....	3
61054J.....	Roast / Meat Thermometer.....	1.....	8
6211J.....	2" Bi-Therm® Thermometer.....	1.....	4
6212J.....	2" Bi-Therm® Thermometer.....	1.....	4



Index

MODEL NO.....	DESCRIPTION	PACK QUANTITY	PAGE
6215J.....	2" Bi-Therm® Thermometer.....	1.....	4
6220J.....	2" Bi-Therm® Thermometer.....	1.....	4
6223.....	2" Bi-Therm® Thermometer.....	1.....	4
6235J.....	2" Bi-Therm® Thermometer.....	1.....	4
6246J.....	CharBroiler Thermometer.....	1.....	11
6714.....	13.25" Color Trak Wall Thermometer.....	4.....	20
681.....	Extra Large Wall Thermometer.....	3.....	20
7029W.....	Digital Bath Scale.....	2.....	32
7370.....	Digital Bath Scale.....	2.....	32
7403.....	Digital Bath Scale.....	2.....	32
7506.....	Digital Bath Scale.....	2.....	32
7562.....	Digital Bath Scale.....	2.....	32
7568.....	Digital Bath Scale.....	2.....	32
8018N.....	1 3/4" Standard Grade Thermometer.....	6.....	14
814OMG.....	Grill / Smoker Thermometer.....	6.....	11
8212J.....	1 3/4" Standard Grade Thermometer.....	1.....	4
8215N.....	1 3/4" Standard Grade Thermometer.....	1.....	4, 17
8220J.....	1 3/4" Standard Grade Thermometer.....	1.....	4
8238J.....	1 3/4" Standard Grade Thermometer.....	1.....	4
8750.....	180° Adhesive Dishwasher Test Labels.....	1 pk of 24 labels.....	15, 17
8751.....	160° Adhesive Dishwasher Test Labels.....	1 pk of 24 labels.....	15, 17
8752.....	170° Adhesive Dishwasher Test Labels.....	1 pk of 24 labels.....	15, 17
8766J.....	160° Dishwasher Temp Test Strips.....	1 pk of 25 strips.....	15, 17
8767J.....	180° Dishwasher Temp Test Strips.....	1 pk of 25 strips.....	15, 17
8769.....	160°/170°/180° Dishwasher Temp Test Strips.....	1 pk of 24 labels.....	15, 17
916WHSVLR.....	Large Dial Bath Scale.....	2.....	32
9305.....	Infrared Thermometer.....	1.....	6
9306N.....	Infrared Thermometer.....	1.....	5, 6, 15
9400BG.....	Replacement Battery Gasket for 9405.....	1.....	29
9405.....	Hand Held Digital Thermometer.....	1.....	5, 15
9405BC.....	Replacement Battery Cover for 9405/9400.....	1.....	29
9405RH.....	Replacement Handle for 9405.....	1.....	29
9405RP.....	Replacement Probe for 9405.....	1.....	6, 29
9523.....	Infrared Thermometer.....	2.....	6, 15
9527.....	Infrared Thermometer.....	2.....	6, 15
9532.....	Infrared Thermometer.....	2.....	5, 6
97S35J.....	Wick for 5522, 5523 Hygrometers.....	1.....	29
9806.....	Clip-On Oven Probe 4' Lead.....	1.....	6
9810-2.....	Hamburger Probe.....	1.....	6
9812.....	Angle Surface Probe.....	1.....	6
9815A.....	Thermocouple Data Logger.....	1.....	5, 15
9817.....	Step-Down Probe.....	1.....	6
9818.....	Step-Down Probe.....	1.....	6
9821.....	K-Type Thermocouple Thermometer.....	2.....	5, 15
9821-PB.....	K-Type Thermocouple Thermometer with Probe.....	2.....	5, 15
9828.....	ThermoCheck Temp Recording System.....	1.....	5
9829.....	TempTaker™ Recording Data Logger.....	1.....	4, 15
9836.....	Adjustable Head Digital Thermometer.....	6.....	7
9839-15.....	Adjustable Head Digital Candy / Deep Fry Thermometer.....	3.....	10
9840PRN.....	Allergen Pocket Digital Thermometer.....	6.....	7, 16
9840RB.....	Pocket Digital Thermometer.....	6.....	7
9841RB.....	Pocket Digital Thermometer.....	6.....	7
9842FDA.....	Pocket Digital Thermometer.....	6.....	7, 16
9848EFDA.....	Pocket Digital Thermometer.....	6.....	7, 16
9857.....	Digital Bath Scale.....	1.....	32
9867FDA.....	Digital Folding Probe Thermometer.....	2.....	5, 16
9877FDA.....	Pocket Digital Thermometer.....	6.....	7, 16
9878E.....	Pocket Digital Thermometer.....	3.....	8, 16
9878EPR.....	Allergen Pocket Digital Thermometer.....	3.....	8, 16
9940N.....	Panel Mount Digital Thermometer.....	6.....	18
9999N.....	HAACP Probe Wipes.....	10.....	16
9999T.....	Thermometer Probe Wipes.....	1.....	16
TE10CSW.....	Waterproof Digital Portion Control Scale.....	1.....	25
TE10FT.....	Compact Digital Portion Control Scale.....	1.....	25
TE10R.....	Digital Portion Control Scale.....	1.....	25
TE10SSW.....	Waterproof Digital Portion Control Scale.....	1.....	25

Index

MODEL NO.....	DESCRIPTION	PACK QUANTITY	PAGE
TE10T.....	10 lb. Digital Portion Control Scale with Tower	1	25
TE11FT.....	Digital Portion Control Scale.....	1	25
TE150.....	Digital Receiving Scale.....	1	28
TE21P.....	Precision Measurement Digital Scale.....	1	25
TE22FT.....	Digital Portion Control Scale.....	1	25
TE22OS.....	Digital Portion Control Scale.....	1	25
TE30WD.....	Wireless Digital Portion Control Scale	1	26
TE32FT.....	Compact Digital Portion Control Scale	1	25
TE400.....	Digital Receiving Scale.....	1	28
TEADPT1	120V adapter for models: TE150, TE400, TE21P	1	29
TEADPT2	220V adapter for models: TE150, TE400, TE21P.....	1	29
TEADPT3	120V adapter for models: TE10R, TE10SS.....	1	29
TEADPT7	Adapter for Europe use only on model TE10R.....	1	29
TEADPT10	120V adapter for TE10T	1	29
TEADPT11	Adapter for TE10SSW	1	29
TEADPT12	120vV Adapter for models: TE10FT, TE11FT, TE22FT, TE22OS, TE32FT	1	29
TEADPT13FT.....	220V Adapter for models: TE10FT, TE11FT, TE22FT, TE32FT...	1	29
TERBAT	Replacement Battery for TE10R.....	1	29
THD32	Heavy Duty Mechanical Scale	1	27
THD32D.....	Heavy Duty Mechanical Scale with Dashpot.....	1	27
THD50	Heavy Duty Mechanical Scale	1	27
TP16.....	Compact Analog Portion Control Scale	1	27
TP16FF.....	Compact Analog Portion Control Scale	1	27
TP32	Compact Analog Portion Control Scale	1	27
TR250.....	Receiving Scale	1	28
TS25KL.....	Analog Portion Control Scale.....	1	26
TS32	Analog Portion Control Scale	1	26
TS32D	Analog Portion Control Scale with Dashpot.....	1	27
TS32F.....	Analog Portion Control Scale	1	26
TS5	Analog Portion Control Scale.....	1	26
TS50.....	Analog Portion Control Scale.....	1	26
W2207	Houdini Corkscrew	4	30
W2634	Houdini Aerating Pourer.....	9	31
W2807	Houdini Vertical Corkscrew.....	6	30
W4041	Houdini Wing Corkscrew.....	4	30
W5577	Houdini Wine Preserver	12	31
W5578	Houdini Vacuum Pump Stoppers.....	12	31
W5614	Houdini 2-Step Waiter's Corkscrew	12	30
W5615	Houdini Magnetic Waiter's Corkscrew	12	30
W6113	Houdini Foil Cutters	12	30
W6115	Houdini Wine / Champagne Sealer	12	31
W6119	Houdini Wine Bottle Stoppers.....	12	31

Terms & Conditions

1. Pricing - Please contact your sales representative for pricing.
2. Minimum Order - Product orders under \$200 net will be charged a \$30 processing fee per order.
3. Freight - All product is shipped FOB Memphis, TN. Routing at factory discretion.
4. Terms - Net 30 days. Interest of 1 1/2% per month will be assessed on outstanding balances past agreed account terms.
5. Standard Packaging - Product must be ordered in minimum quantities of shelf packs only.
6. Lead Time - Taylor requires a minimum of 10 working days to ship orders from the day the order is received via phone, mail, fax or EDI at Customer Service.
7. Back Orders - Back orders will be shipped as soon as possible after prior authorization from customer.
8. Returns - A "Returned Goods Authorization" (RGA) must be obtained from Taylor before a return for any reason will be accepted. Shipments without an RGA will be refused. Contact Customer Service for an RGA.
9. EDI - Taylor is fully prepared to receive your orders via EDI. For information about Taylor's EDI capabilities, please contact Customer Service.
10. Claims - Taylor is not responsible for damage, loss or pilferage in transit. Goods are carefully packed to prevent damage. If damage or loss is found on receipt of goods, notify carrier AT ONCE to request an inspection. Customer bears the responsibility for filing carrier claims.

Due to continuous product improvements,
pictures in catalog may differ slightly
from the actual product.



Notes

[illegible]

Notes

[illegible]



All orders and customer service inquiries please contact:

Customer Service:

Taylor Precision Products, Inc.
Las Cruces, NM 88001
Phone: 575-526-0944
Toll Free: 800-225-4834
Fax Orders: 575-526-4347
CustomerOrders@taylorusa.com

All Returns go to:

Taylor Precision Products, Inc.
2220 Entrada del Sol, Suite A
Las Cruces, NM 88001

Corporate Headquarters:

Taylor Precision Products, Inc.
2311 W. 22nd Street, Suite 200
Oak Brook, IL 60523
Phone: 630-954-1250
Fax: 630-954-1275
www.taylorusa.com



Facebook us at:

www.facebook.com/TaylorPrecisionProducts

